



CellAdvisor™

JD745B Base Station Analyzer Specifications

Spectrum Analyzer (standard)

Frequency		
Frequency range	100 kHz to 4 GHz	
Internal 10 MHz Frequency Reference		
Accuracy	±0.05 ppm + aging (0 to 50°C)	
Aging	±0.5 ppm/year	
Frequency Span		
Range	0 Hz (zero span) 10 Hz to full span	
Resolution	1 Hz	
Resolution Bandwidth (RBW)		
-3 dB bandwidth	1 Hz to 3 MHz	1-3-10 sequence
Accuracy	±10% (nominal)	
Video Bandwidth (VBW)		
-3 dB bandwidth	1 Hz to 3 MHz	1-3-10 sequence
Accuracy	±10% (nominal)	
Single Sideband (SSB) Phase Noise		
Fc 1 GHz, RBW 10 kHz, VBW 1 kHz, RMS detector		
Carrier Offset		
30 kHz	< -90 dBc/Hz (typical)	
100 kHz	< -95 dBc/Hz (typical)	
1 MHz	< -102 dBc/Hz (typical)	
Measurement Range		
DANL to +20 dBm		
Input attenuator range	0 to 50 dB, 5 dB steps	
Maximum Input Level		
Average continuous power	+20 dBm	
DC voltage	±50 V DC	

Spectrum Analyzer: 100 kHz to 4 GHz

Cable and Antenna Analyzer: 5 MHz to 4 GHz

Power Meter: 10 MHz to 4 GHz

Specification Conditions

JD745B specifications apply under these conditions:

- The instrument has been turned on for at least 15 minutes
- The instrument is operating within a valid calibration period
- Data with no tolerance are considered typical values
- Cable and antenna measurements apply after calibration to the OSL standard
- Typical and nominal values are defined as:
 - Typical: expected performance of the instrument operating at 20 to 30°C after being at this temperature for 15 minutes
 - Nominal: a general, descriptive term or parameter

Displayed Average Noise Level (DANL)	
1 Hz RBW, 1 Hz VBW, 50 Ω termination, 0 dB attenuation, RMS detector	
Preamplifier Off	
10 MHz to 2.3 GHz	-140 dBm (-146 dBm, typical)
>2.3 GHz to 3 GHz	-138 dBm (-144 dBm, typical)
>3 GHz to 4 GHz	-135 dBm (-140 dBm, typical)
Preamplifier On	
10 MHz to 2.3 GHz	-155 dBm (-160 dBm, typical)
>2.3 GHz to 3 GHz	-153 dBm (-158 dBm, typical)
>3 GHz to 4 GHz	-150 dBm (-156 dBm, typical)
Display Range	
Log scale and units (10 divisions displayed)	1 to 20 dB/division in 1 dB steps dBm, dBV, dBmV, dB μ V
Linear scale and units (10 divisions displayed)	V, mV, mW, W
Detectors	Normal, positive peak, sample, negative peak, RMS
Number of traces	6
Trace functions	Clear/write, maximum hold, minimum hold, capture, load view on/off, trace math
Total Absolute Amplitude Accuracy	
Preamplifier off, power level > -50 dBm, auto-coupled (20 to 30°C)	
5 MHz to 4 GHz	± 1.25 dB, ± 0.5 dB (typical)
	Attenuation < 40 dB
	± 1.55 dB, ± 1.0 dB (typical)
	Attenuation ≥ 40 dB
Reference Level	
Setting range	-120 to +100 dBm
Setting Resolution	
Log scale	0.1 dB
Linear scale	1% of reference level
Markers	
Marker types	Normal, delta, delta pair, noise, frequency count marker
Number of markers	6
Marker functions	Peak, next peak, next peak left, next peak right, minimum search marker to center/start/stop, always peak on/off
RF Input VSWR	
20 MHz to 4 GHz	1.5:1 (typical)
Second Harmonic Distortion	
Mixer level	-25 dBm
10 MHz to 1.3 GHz	< -65 dBc (typical)
>1.3 GHz to 4 GHz	< -70 dBc (typical)
Third-Order Inter-Modulation (third-order intercept: TOI)	
200 MHz to 2 GHz	+10 dBm (typical)
>2 GHz to 4 GHz	+12 dBm (typical)

Spurious	
Inherent residual response	
Input terminated, 0 dB attenuation, preamplifier off, RBW at 10 kHz, Sweep mode	
20 MHz to 3 GHz	-90 dBm (nominal)
>3 GHz to 4 GHz	-85 dBm (nominal)
Exceptions	< -70 dBm at 227.88/770.4/1791.8/2647.8/2927.3/3195.2/3915.1/3640 MHz
Input-related spurious	< -67 dBc (nominal)
Dynamic Range	
2/3 (TOI-DANL) in 1 Hz RBW	>95 dB
Sweep Time	
Range	80 ms to 1000 s 24 μ s to 200 s
	Span = 0 Hz (zero span)
Accuracy	$\pm 2\%$
	Span = 0 Hz (zero span)
Mode	Continuous, single
Gated Sweep	
Trigger source	External, video, and GPS
Gate length	1 μ s to 100 ms
Gate delay	0 to 100 ms
Trigger	
Trigger source	Free run, video, external, GPS
Trigger Delay	
Range	0 to 200 s
Resolution	6 μ s
Measurements*	
Channel power	
Occupied bandwidth	
Spectrum emission mask	
Adjacent channel power	
Spurious emissions	
Field strength	
AM/FM audio demodulation	
Route map	
PIM detection	
Dual spectrum	

* CW signal generator (Option 003) can be set up simultaneously.

Cable and Antenna Analyzer (standard)

Frequency	
Range	5 MHz to 4 GHz
Resolution	10 kHz
Accuracy	±25 ppm + aging (20 to 30C°)
Aging	±5 ppm
Data Points	
126, 251, 501, 1001	
Measurement Speed	
1.65 ms/point (nominal)	
Measurement Accuracy	
Corrected directivity	40 dB
Reflection uncertainty	$\pm(0.3 + 20\log(1+10^{-EP/20}))$ (typical) EP = directivity – measured return loss
Output Power	
High	0 dBm (typical)
Low	-30 dBm (typical)
Dynamic Range	
Reflection	60 dB
Maximum Input Level	
Average continuous power	+25 dBm (nominal)
DC voltage	±50 V DC
Interference Immunity	
On channel	+17 dBm at >1.4 MHz from carrier frequency (nominal)
On frequency	0 dBm within ±10 kHz from the carrier frequency (nominal)
Measurements	
Reflection (VSWR)	
VSWR range	1 to 65
Return loss range	0 to 60 dB
Resolution	0.01
Distance to Fault (DTF)	
Vertical VSWR range	1 to 65
Vertical return loss range	1 to 60 dB
Vertical resolution	0.01
Horizontal range	0 to (# of data points – 1) x horizontal resolution
	Maximum = 1500 m (4921 ft)
Horizontal resolution	$(1.5 \times 10^8) \times (V_p)/\Delta$ V_p = propagation velocity Δ = stop freq – start freq (Hz)
Cable Loss (1-port)	
Range	0 to 30 dB
Resolution	0.01 dB
1-Port Phase	
Range	-180 to +180°
Resolution	0.01°
Smith Chart	
Resolution	0.01

RF Power Meter (standard)

General Parameters			
Display range	100 to +100 dBm		
Offset range	0 to 60 dB		
Resolution	0.01 dB or 0.1 x W (x = m, u, p)		
Internal RF Power Sensor			
Frequency range	10 MHz to 4 GHz		
Span	100 kHz to 100 MHz		
Dynamic range	-120 to +20 dBm		
Maximum power	+20 dBm		
Accuracy	Same as spectrum analyzer		
External RF Power Sensors			
Directional	JD731B	JD733A	
Frequency range	300 MHz to 3.8 GHz	150 MHz to 3.5 GHz	
Dynamic range	0.15 to 150 W (average) 4 to 400 W (peak)	0.1 to 50 W (average) 0.1 to 50 W (peak)	
Connector type	Type-N female on both ends		
Measurement type	Forward/reverse average power, forward peak power, VSWR		
Accuracy	±(4% of reading + 0.05 W) ^{1,2}		
Terminating	JD732B	JD734B	JD736B
Frequency range	20 MHz to 3.8 GHz		
Dynamic range	-30 to +20 dBm		
Connector type	Type-N male		
Measurement type	Average	Peak	Average and peak
Accuracy	±7% ¹		

Optical Power Meter (Standard)


Optical Power Meter		
Display range	-100 to +100 dBm	
Offset range	0 to 60 dB	
Resolution	0.01 dB or 0.1 mW	
External Optical Power Sensors		
	MP-60A	MP-80A
Wavelength range	780 to 1650 nm	
Max permitted input level	+10 dBm	+23 dBm
Connector type	Type-N female on both ends	
Connector input	Universal 2.5 and 1.25 mm	
Accuracy	±5%	

1. CW condition at 25°C ±10°C

2. Forward power

2-Port Transmission Measurements (Option 001)

Frequency	
Frequency range	5 MHz to 4 GHz
Frequency resolution	10 kHz
Transmission uncertainty	

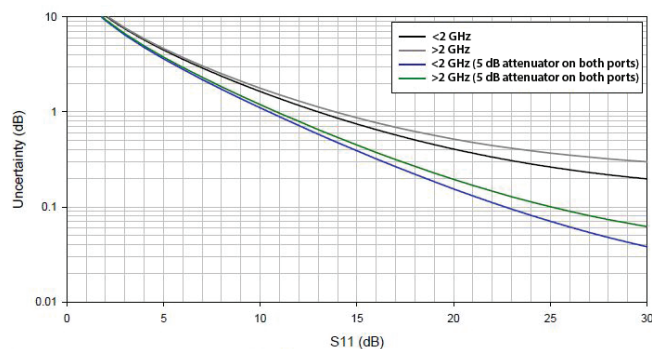

Use 5 dB attenuators on both ports to lessen uncertainty.

Output Power	
High	0 dBm (typical)
Low	-30 dBm (typical)
Measurement Speed	
Vector	2.2 ms/point (nominal)
Dynamic Range	
Vector	5 MHz to 3 GHz, 80 dB >3 GHz to 4 GHz, 75 dB
Scalar	5 MHz to 4 GHz, >100 dB
Measurements	
Insertion Loss/Gain	
Range	-120 to 100 dB
Resolution	0.01 dB
2-Port Phase	
Range	-180 to +180°
Resolution	0.01°

Bias-Tee (Option 002)

Voltage	
Voltage range	+12 to +32 V
Voltage resolution	0.1 V
Power	
8 W Max	

CW Signal Generator (Option 003)

Frequency	
Frequency range	25 MHz to 4 GHz
Frequency reference	±25 ppm Maximum
Frequency resolution	10 kHz
Output Power	
Range	0 dBm, -30 to -80 dBm
Step	1 dB

Accuracy	±1.5 dB, (0 dBm, -30 to -60dBm) ± 2.5 dB (-60 to -80 dBm) (15 to 35°C)
----------	--

GPS Receiver and Antenna (Option 010)

GPS Indicator	
Latitude, longitude, altitude	
High-Frequency Accuracy	
Spectrum, interference, and signal analyzer	
GPS lock	±25 ppb
Hold over (for 3 days)	±50 ppb (0 to 50°C)
	15 minutes after satellite locked
Connector	SMA, female

Interference Analyzer (Option 011)

Measurements	
Spectrum analyzer	Sound indicator, AM/FM audio demodulation, interference ID, spectrum recorder
Spectrogram	Collect up to 72 hours of data
RSSI	Collect up to 72 hours of data
Interference finder	
Spectrum replayer	
Dual spectrogram	

Channel Scanner (Option 012)

Frequency Range	
10 MHz to 4 GHz	
Measurement Range	
110 to +20 dBm	
Measurements	
Channel scanner	1 to 20 channels
Frequency scanner	1 to 20 frequencies
Custom scanner	1 to 20 channels or frequencies

Bluetooth Connectivity (Option 013)

Personal area network (PAN)	
File transfer profile (FTP)	
Web-based remote control	

WiFi Connectivity (Option 016)

Measurements	
Interface type	USB LAN card
Interface standard	IEEE 802.11 b/g/n
Chipset	RealTek, Ralink
USB wireless mode	Infrastructure mode
Web-based remote control	Internet Explorer, Chrome, Safari
Internet protocol version	IPv4, IPv6

cdmaOne/cdma2000® Signal Analyzer (Options 020 and 040)

General Parameters				
Frequency range	Band 0 to 10			
Input signal level	-40 to +20 dBm			
RF channel power accuracy	±1.0 dB (typical)			
CDMA compatibility	cdmaOne and cdma2000			
Frequency error	±10 Hz + ref freq accuracy	99% confidence level		
Rho accuracy	±0.005	0.9 < Rho < 1.0		
Residual Rho	>0.995 (typical)			
PN offset	1 x 64 chips			
Code domain power	±0.5 dB relative power ±1.5 dB absolute power	Code channel power > -25 dB Code channel power > -25 dB		
Pilot power accuracy	±1.0 dB (typical)			
Time offset	±1.0 μs, ±0.5 μs (typical)	External trigger		
Measurements				
Option 020				
Channel Power	Rel power at defined range	Time offset	Pilot, Paging, Sync, Q-Paging	Frequency error
Channel power	Multi-ACPR	Carrier feed-through	CDP Table	Time offset
Spectral density	Lowest reference power	PN offset	Reference power	Carrier feed-through
Peak to average power	Highest reference power	Code Domain Power	Code utilization	Pilot power
Occupied Bandwidth	Abs power at defined range	Abs/Rel code power	Code, spreading factor	Max inactive power
Occupied bandwidth	Rel power at defined range	Channel power	Allocation (channel type)	PN offset
Integrated power	Spurious Emissions	Power bar graph (Abs/Rel)	Relative, absolute power	Power Statistics CCDF
Occupied power	Peak freq at defined range	Pilot, paging, sync, Q-paging	Auto Measure	
Spectrum Emission Mask	Peak level at defined range	Max, avg active power	Channel power	
Reference power	Constellation	Max, avg inactive power	Occupied bandwidth	
Peak level at defined range	Pilot power	PN offset	Spectrum emission mask	
ACPR	Rho	Codogram	ACPR	
Reference power	EVM	Code utilization	Multi-ACPR	
Abs power at defined range	Frequency error	RCSI	Rho	
Option 040				
Channel Scanner (up to 6)	Ec/lo, pilot power, delay	PN offset	Peak amplifier capacity	
Frequencies or channels	Multipath Profile	Pilot, paging, sync, Q-paging power	Average amplifier capacity	
Channel power, PN offset	Channel power	Max, avg active power	Code utilization	
Pilot power, Ec/lo	Multipath power	Max, avg inactive power	Peak utilization	
PN Scanner (up to 6)	Ec/lo, delay	Frequency error	Average utilization	
Channel power	Code Domain Power	Time offset, Rho, EVM	Route Map	
Pilot dominance	Abs/Rel code power	Carrier feed-through	Pilot power	
PN offset	Channel power	Amplifier capacity	Ec/lo	

Longitude, latitude, and satellite in all screens

EV-DO Signal Analyzer (Options 021 and 041)

General Parameters				
Frequency range	Band 0 to 10			
Input signal level	-40 to +20 dBm			
RF channel power accuracy	±1.0 dB (typical)			
EV-DO compatibility	Rev 0, Rev A and Rev B			
Frequency error	±10 Hz + ref freq accuracy	99% confidence level		
Rho accuracy	±0.005	0.9 < Rho < 1.0		
Residual Rho	>0.995 (typical)			
PN offset	1 x 64 chips			
Code domain power	±0.5 dB relative power ±1.5 dB absolute power	Code channel power > -25 dB Code channel power > -25 dB		
Pilot power accuracy	±1.0 dB (typical)			
Time offset	±1.0 µs, ±0.5 µs (typical)	External trigger		
Measurements				
Option 021				
Channel Power	Abs power at defined range	Pilot, MAC, data EVM	Data channel power	Spectrum emission mask
Channel power	Rel power at defined range	Constellation (pilot, MAC 64/128, and data)	Slot average power	ACPR
Spectral density	Spurious Emissions	Channel power	Max, avg active power	Multi-ACPR
Peak to average power	Peak frequency at defined range	Rho, EVM, peak CDE	Max, avg inactive power	Pilot, MAC, data power
Occupied Bandwidth	Peak level at defined range	Frequency error	PN offset	On/off ratio
Occupied bandwidth	Power vs. Time (idle and active slot)	Time offset	MAC Codogram	PvsT mask (idle slot) or PvsT mask (active slot)
Integrated power	Slot average power	Carrier feed-through	Code utilization	Frequency error
Occupied power	On/off ratio	PN offset	RCSI	Time offset
Spectrum Emission Mask	Idle activity	Modulation type*	Slot, pilot, MAC, data	Carrier feed-through
Reference power	Pilot, MAC, data power	Code Domain Power (pilot and MAC 4/128)	MAC CDP Table	Pilot, MAC, data Rho
Peak level at defined range	Constellation (composite 64/128)	Pilot/MAC channel power	Reference power	Max inactive I/Q power
ACPR	Channel power	Slot average power	Code utilization	PN offset
Reference power	Rho, EVM, Peak CDE	Max active I/Q power	Code, spreading factor	Power Statistics CCDF
Abs power at defined range	Frequency error	Avg active I/Q power	Allocation (channel type)	
Rel power at defined range	Time offset	Max inactive I/Q power	Relative, absolute power	
Multi-ACPR	Carrier feed-through	Avg inactive I/Q power	Auto Measure	
Lowest reference power	PN offset	PN offset	Channel power	
Highest reference power	Pilot, MAC, data power	Code Domain Power (data)	Occupied bandwidth	
Option 041				
Channel Scanner (up to 6)	Pilot dominance	Ec/Io, delay	(Composite) EVM	Code utilization
Frequencies or channels	PN offset	Code Domain Power	Frequency error	Peak utilization
PN offset	Ec/Io, pilot power, delay	Slot average power	Time offset	Average utilization
Pilot, MAC, data power	Multipath Profile	PN offset	Carrier feed-through	Route Map
PN Scanner (up to 6)	Channel power	Pilot, MAC, data power	Max active I/Q power	Pilot power
Channel power	Multipath power	Pilot, MAC, data Rho	Avg active I/Q power	Ec/Io

Longitude, latitude, and satellite in all screens

*Measurement is performed in Data Constellation only.

GSM/GPRS/EDGE Signal Analyzer (Options 022 and 042)

General Parameters		
Frequency range	450 MHz to 500 MHz 820 MHz to 965 MHz 1.705 GHz to 1.995 GHz	
Input signal range	-40 to +20 dBm	
Burst power	±1.0 dB	
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level
GMSK modulation quality		
Phase RMS Accuracy		
Residual error	±1.0 degrees	(0 < Phase RMS < 8)
Phase peak accuracy	0.7 degrees (typical)	
8 PSK modulation quality	±2.0 degrees	(0 < Phase peak < 30)
EVM Accuracy		
Residual error	±1.5%	(2% < EVM < 8%)
RF power vs. time	2.5%	
	±0.25 symbol	

Measurements				
Option 022				
Channel Power	Peak level at defined range	TSC (Slot 0 to 7)	C/I*	PvsT – Mask
Channel power	Spurious Emissions	Constellation	EVM RMS*	Frame average power
Spectral density	Peak frequency at defined range	Burst power	EVM Peak*	Frequency error
Peak to average power	Peak level at defined range	Modulation type	EVM 95th*	Phase error RMS
Occupied Bandwidth	Power vs. Time (slot)	Frequency error	Auto Measure	Phase error peak
Occupied bandwidth	Burst power	Phase error RMS	Channel power	EVM RMS*
Integrated power	Max/min point	Phase error peak	Occupied bandwidth	EVM Peak*
Occupied power	Power vs. Time (frame)	I/Q origin offset*	Spectrum emission mask	I/Q origin offset
Spectrum Emission Mask	Frame average power	TSC	Spurious emission mask	C/I*
Reference power	Burst power (Slot 0 to 7)	BSIC	Burst power	
Option 042				
Channel/Frequency Scanner	BSIC (NCC, BCC)	SNR, delay	Frame average power	Modulation type
Channels or frequencies	Multipath Profile	Modulation Analyzer	BSIC, frame no. and time	
Absolute power	(10 strongest)	Frame avg power trend	C/I, frequency error	
Group (traffic, control)	Frame average power	C/I trend	Burst power	

Longitude, latitude, and satellite in all screens

* Measurements performed for 8PSK modulation signals (edge) only.

WCDMA/HSPA + Signal Analyzer (Options 023 and 043)

General Parameters			
Frequency range	Band 1 to 14, 19 to 22, 25, 26		
Input signal range	-40 to +20 dBm		
RF channel power accuracy	±1.0 dB, ±0.7 dB (typical)		
Occupied bandwidth accuracy	±100 kHz		
Adjacent channel leakage ratio (ACLR)	<-56 dB, ±0.7 dB at 5 MHz offset, <-58 dB, ±0.8 dB at 10 MHz offset		
WCDMA modulation	QPSK		
HSPA+ modulations	QPSK, 16 QAM, 64 QAM		
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level	
EVM accuracy	±2.0%	2% ≤ EVM ≤ 20%	
Residual EVM	2.5% (typical)		
Code domain power	±0.5 dB relative power ±1.5 dB absolute power	Code channel power >-25 dB Code channel power >-25 dB	
CPICH power accuracy	±0.8 dB (typical)		
Measurements			
Option 023			
Channel Power	Abs power at defined range	Max, avg active power	Allocation (channel type)
Channel power	Rel power at defined range	Max, avg inactive power	EVM, modulation type
Spectral density	Spurious Emissions	Scramble code	Relative, absolute power
Peak to average power	Peak frequency at defined range	Relative Code Domain Error	Auto Measure
Occupied Bandwidth	Peak level at defined range	Abs/Rel code power	Channel power
Occupied bandwidth	Constellation	Code error	Occupied bandwidth
Integrated power	CPICH power	Individual code EVM, RCDE, and its constellation	Spectrum emission mask
Occupied power	Rho, EVM	Channel power	ACLR
Spectrum Emission Mask	Peak CDE	Power bar graph (Abs/Rel/Delta power) CPICH, P-CCPCH, S-CCPCH, PICH, P-SCH, S-SCH	Multi-ACLR
Reference power	Frequency error	Avg RCDE QPSK, 16 QAM, 64 QAM	Spurious emission mask
Peak level at defined range	Time offset	Codogram	Frequency error
ACLR	Carrier feed-through	Code utilization	EVM
Reference power	Scramble code	RCSI	Peak CDE
Abs power at defined range	Code Domain Power	CPICH, P-CCPCH, S-CCPCH, PICH, P-SCH, S-SCH	Carrier feed-through
Rel power at defined range	Abs/Rel code power	CDP Table	CPICH absolute power
Multi-ACLR	Individual code EVM and its constellation	Reference power	CPICH relative power
Lowest reference power	Channel power	Code utilization	Max inactive power
Highest reference power	Power bar graph (Abs/Rel/Delta power) CPICH, P-CCPCH, S-CCPCH, PICH, P-SCH, S-SCH	Code, spreading factor	Scramble code
Power Statistics CCDF			
Option 043			
Channel Scanner (up to 6)	Multipath Profile	CPICH, P-CCPCH, S-CCPCH, PICH, P-SCH, S-SCH	Amplifier capacity
Frequencies or channels	Channel, multipath power	Max, avg active power	Peak amplifier capacity
Channel power, scramble code, CPICH power, Ec/Io	Ec/Io, delay	Max, avg inactive power	Average amplifier capacity
Scramble Scanner (up to 6)	Code Domain Power	Frequency error	Code, peak utilization
Channel power	Abs/Rel code power	Time offset, Rho	Average utilization
CPICH dominance	Individual code EVM	Carrier feed-through	Route Map
Scramble code	Channel power	(Composite) EVM	CPICH power, Ec/Io
Ec/Io, CPICH power, delay	Scramble code	CPICH EVM, P-CCPCH EVM	

Longitude, latitude, and satellite in all screen

TD-SCDMA Signal Analyzer (Options 025 and 045)

General Parameters				
Frequency range	1.785 GHz to 2.22 GHz			
Input signal level	-40 to +25 dBm			
Channel power (RRC) accuracy	±1.0 dB (typical)			
Modulations	QPSK, 8 PSK, 16 QAM, 64 QAM			
Frequency error	±10 Hz + ref freq accuracy	99% confidence level		
Residual EVM (RMS)	2.0% (typical)	P-CCPCH slot and 1 channel		
Time error (Tau)	±1.0 µs (typical)	External trigger		
Spreading factor	Auto (DL, UL), 1, 2, 4, 8, 16			
Measurements				
Option 025				
Channel Power	Power vs. Time (slot)	Constellation	Code power and error	Peak CDE
Channel power	Slot power	Rho	Individual code EVM and its constellation	Max inactive power
Spectral density	DwPTS power	EVM RMS, EVM peak	Data format	Scramble code
Peak to average power	UpPTS power	Peak CDE	Slot, DwPTS power	
Occupied Bandwidth	On/off slot ratio	Frequency error	No. of active code	
Occupied bandwidth	Slot PAR	I/Q origin offset	Scramble code	
Integrated power	DwPTS code	Time offset	Max active code power	
Occupied power	Power vs. Time (frame)	Midamble Power	Avg active code power	
Spectrum Emission Mask	Slot power	Slot power	Max inactive code power	
Reference power	(TS [0 to 6], DwPTS, UpPTS)	DwPTS power	Avg inactive code power	
Peak level at defined range	Data power left	Midamble power (1 to 16)	Peak CDE and peak active CDE	
ACLR	(TS [0 to 6], DwPTS, UpPTS)	Code Power	Auto Measure	
Reference power	Midamble Power	Abs/Rel code power	Channel power	
Abs power at defined range	(TS [0 to 6], DwPTS, UpPTS)	Individual code EVM and its constellation	Occupied bandwidth	
Rel power at defined range	Data power right	Data format	Spectrum emission mask	
Multi-ACLR	(TS [0 to 6], DwPTS, UpPTS)	Slot power, DwPTS power	ACLR	
Lowest reference power	Time offset	No. of active code	Multi-ACLR	
Highest reference power	(TS [0 to 6], DwPTS, UpPTS)	Scramble code	Slot power	
Abs power at defined range	Power vs. Time (mask)	Max active code power	DwPTS power	
Rel power at defined range	Slot power	Avg active code power	UpPTS power	
Spurious Emissions	On/off slot ratio	Max inactive code power	On/off slot ratio	
Peak frequency at defined range	Off power	Avg inactive code power	Frequency error	
Peak level at defined range	Timogram	Code Error	EVM RMS	
Option 045				
Sync-DL ID Scanner (32)	Sync-DL ID vs. Tau (up to 6)	Ec/Io, Tau	DwPTS power	DwPTS Power
Scramble code group	ID, power, Ec/Io, Tau	DwPTS power	Pilot dominance	
Ec/Io, Tau	DwPTS power	Pilot dominance	EVM, frequency error	
DwPTS power	Pilot dominance	Sync-DL ID Analyzer	Ec/Io, CINR	
Pilot dominance	Sync-DL ID Multipath	DwPTS power, Ec/Io trend	Route Map	

Longitude, latitude, and satellite in all screens

Mobile WiMAX Signal Analyzer (Options 026 and 046)

General Parameters		
Frequency range	2.1 GHz to 2.7 GHz 3.4 GHz to 3.85 GHz	
Input signal level	-40 to +20 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidth	7 MHz, 8.75 MHz, and 10 MHz	
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level
Residual EVM (RMS)	1.5% (typical)	

Measurements

Option 026

Channel Power	Peak level at defined range	Frequency error	EVM vs. Symbol	Frame average power
Channel power	Power vs. Time (frame)	Time offset	RCE RMS, RCE peak	Time offset
Spectral density	Channel power	Segment ID, cell ID	EVM RMS, EVM peak	I/Q origin offset
Peak to average power	Frame average power	Preamble index	Segment ID, cell ID	Spectral flatness
Occupied Bandwidth	Preamble power	Spectral Flatness	Preamble index	Frequency error
Occupied bandwidth	DL burst power	Average subcarrier power	Auto Measure	RCE RMS
Integrated power	UL burst power	Subcarrier power variation	Channel power	RCE peak
Occupied power	I/Q origin offset	Max, min, avg power	Occupied bandwidth	EVM RMS
Spectrum Emission Mask	Time offset	EVM vs. Subcarrier	Spectrum emission mask	EVM peak
Reference power	Constellation	RCE RMS, RCE peak	Spurious emission mask	Power Statistics CCDF
Peak level at defined range	Channel power	EVM RMS, EVM peak	Preamble power	
Spurious Emissions	RCE RMS, RCE peak	Segment ID, cell ID	DL burst power	
Peak frequency at defined range	EVM RMS, EVM peak	Preamble index	UL burst power	

Option 046

Preamble Scanner (up to 6)	Total preamble power	Preamble power	Time offset	
Total preamble power	Multipath power	Frame avg power	Route Map	
Preamble, relative power	Relative power, delay	Relative power	Preamble power	
Cell ID, sector ID	Preamble power trend	C/I		
Time offset	Preamble Power Trend	Preamble		
Multipath Profile	Relative power trend	Cell ID, sector ID		

Longitude, latitude, and satellite in all screens

LTE/LTE-Advanced – FDD Signal Analyzer (Options 028/030/032 and 048)

General Parameters		
Frequency range	Band 1 to 14, 17 to 26	
Input signal level	-40 to +20 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidths	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, and 20 MHz	
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level
Residual EVM (RMS)	2.0% (typical)	Data EVM

Measurements

Option 028/030/032

Channel Power	Power vs. Time (frame)	Control Channel	Data EVM RMS, peak	Antenna 1 RS power and EVM	PDSCH/Data* 64 QAM EVM
Channel power	Frame average power	Control channel summary (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*)	RS EVM RMS, peak		PDSCH 256QAM EVM
Spectral density	Subframe power		Cell, group, sector ID	Antenna 2 RS power and EVM**	Data EVM RMS, peak
Peak to average power	First slot power		Frame		RS, P-SS, S-SS EVM
Occupied Bandwidth	Second slot power		MBSFN*	Antenna 3 RS power and EVM**	RS, P-SS, S-SS power
Occupied bandwidth	Cell ID, I/Q origin offset	EVM, relative or absolute power, modulation type	Frame summary table (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/Data* 64 QAM, PDSCH 256QAM)	Data Allocation Map	PBCH power
Integrated power	Time offset			Data allocation vs frame	Subframe power
Occupied power	Constellation	Each control channels'		Resource block power	OFDM power
Spectrum Emission Mask	MBSFN*	I/Q diagram	QPSK, PDSCH/Data* 16 QAM, PDSCH/Data* 64 QAM, PDSCH 256QAM)	OFDM symbol power	Time error
Reference power	RS TX power	Modulation format		Data utilization	I/Q origin offset
	PDSCH/Data* QPSK EVM	Frequency error			Carrier Aggregation**
Peak level at defined range	PDSCH/Data* 16 QAM EVM	I/Q origin offset	EVM, relative or absolute power, modulation type	Data allocation vs subframe	Component carriers: up to 5
ACLR	PDSCH/Data* 64 QAM EVM	EVM RMS, EVM peak		Resource block power	
	PDSCH 256QAM EVM				
Reference power	Data EVM RMS	Subframe	Frame average power	Data utilization	Subframe power
Abs power at defined range	Data EVM peak	MBSFN*	OFDM symbol power	Auto Measure	P-SS, S-SS, PBCH, RS power and EVM
Rel power at defined range	Frequency error	Subframe summary table (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/Data* QPSK, PDSCH/Data* 16 QAM, PDSCH/Data* 64 QAM, PDSCH 256QAM)	Frequency error	Channel power	PDSCH/Data* QPSK power and EVM
Multi-ACLR	Time error		I/Q origin offset	Occupied bandwidth	PDSCH/Data* 16 QAM power and EVM
	Data Channel		EVM RMS, peak	Spectrum emission mask	PDSCH/Data* 64 QAM power and EVM
Lowest reference power	MBSFN*		Data EVM RMS, peak	ACLR	PDSCH/Data* 64 QAM power and EVM
Highest reference power	Resource block power		Cell, group, sector ID	Multi-ACLR	PDSCH/Data* 64 QAM power and EVM
Abs power at defined range	I/Q diagram		Time Alignment Error	Spurious emission mask	PDSCH 256QAM EVM
	RB power	EVM, relative or absolute power, modulation type	Time alignment error trend	Frame average power	Cell ID
Rel power at defined range	Modulation format			Time alignment error	Frequency error
					Time alignment error
Spurious Emissions	I/Q origin offset	Subframe power	Time alignment error	Frequency error	Antenna port
Peak frequency at defined range	EVM RMS, EVM peak	OFDM symbol power	RS power difference	MBSFN*	Power Statistics
		Frequency, time error	Antenna 0 RS power and EVM	PDSCH/Data* QPSK EVM	CCDF
Peak level at defined range				PDSCH/Data* 16 QAM EVM	

Option 048

Channel Scanner (up to 6)	ID Scanner (up to 6)	Multipath Profile	Control channel table	PMCH subframe power*	Route Map
Frequency or channels	RSRP/RSRQ dominance	Cell, group, sector ID	(P-SS, S-SS, PBCH, PCFICH, RS 0, RS 1, RS 2**, RS 3**, MBSFN RS*)	Time alignment error	RSRP
Cell, group, sector ID	S-SS RSSI dominance	Ant 0 RS Ec/Io, delay		Time offset	RSRQ
Channel power	S-SS Ec/Io dominance	Ant 1 RS Ec/Io, delay		Datagram	RS-SINR
RSRP/RSRQ	Cell, group, sector ID	Ant 2 RS Ec/Io**, delay**	Absolute power	Datagram	S-SS RSSI
RS-SINR	RSRP/RSRQ	Ant 3 RS Ec/Io**, delay**	Relative power	Resource block power	P-SS/S-SS Power
Antenna port	RS-SINR/S-SS RSSI	Control Channel	EVM RSM, phase	Data utilization	S-SS Ec/Io
	P-SS/S-SS Power	RS power trend	Frequency error		
	S-SS Ec/Io	Cell, group, sector ID			

Longitude, latitude, and satellite in all screens

*Measurement is performed when MBMS is enabled.

**Measurement is performed when option 030 is enabled.

LTE/LTE-Advanced – TDD Signal Analyzer (Options 029/031/033 and 049)

General Parameters					
Frequency range	Band 33 to 43				
Input signal level	-40 to +20 dBm				
Channel power accuracy	±1.0 dB (typical)				
Supported bandwidth	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, and 20 MHz				
Frequency error	±10 Hz + reference-frequency accuracy			99% confidence level	
Residual EVM (RMS)	2.0% (typical)			Data EVM	
Measurements					
Option 029/031/033					
Channel Power	Spurious Emissions	Data EVM peak	Subframe	Antenna 3 RS power and EVM**	PDSCH/Data* 64 QAM EVM
Channel power	Peak frequency at defined range	Frequency error	MBSFN*		PDSCH 256QAM EVM
Spectral density		Time error	Subframe summary table	Cell, group, sector ID	Data EVM RMS, peak
Peak to average power	Peak level at defined range	Data Channel	(P-SS, S-SS, PBCH, PC-FICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/Data* QPSK, PDSCH/Data* 16 QAM, PDSCH/Data* 64 QAM, PDSCH 256QAM)	Data Allocation Map	RS, P-SS, S-SS EVM
Occupied Bandwidth		MBSFN*		Data allocation vs frame	RS, P-SS, S-SS power
Occupied bandwidth	Power vs. Time (frame)	Resource block power		Resource block power	PBCH power
Integrated power	Frame average power	I/Q diagram		OFDM symbol power	Subframe power
Occupied power	Subframe power	RB power		Data utilization	OFDM power
Spectrum Emission Mask	First slot power	Modulation format	EVM, relative or absolute power, modulation type	Data allocation vs subframe	Time error
Reference power	Second slot power	I/Q origin offset			I/Q origin offset
Peak level at defined range	Cell ID, I/Q origin offset	EVM RMS, EVM peak	Subframe power	Resource block power	Carrier Aggregation**
	Time offset	Control Channel	OFDM symbol power	Data utilization	Component carriers: up to 5
ACLR	Power vs. Time (slot)	Control channel summary (P-SS, S-SS, PBCH, PC-FICH, PHICH, PDCCH, RS, MBSFN*)	Frequency, time error	Auto Measure	
Reference power	Slot average power		Data EVM RMS, peak	Channel power	Subframe power
Abs power at defined range	Transient period length		RS EVM RMS, peak	Occupied bandwidth	P-SS, S-SS, PBCH, RS power and EVM
	Off power		Cell, group, sector ID	Spectrum emission mask	
Rel power at defined range	Constellation	EVM, relative or absolute power, modulation type	Time Alignment Error	ACLR	PDSCH/Data* QPSK power and EVM
	MBSFN*		Time alignment error trend	Multi-ACLR	
Multi-ACLR	RS TX power	Each control channels'	Time alignment error	Spurious emission mask	PDSCH/Data* 16 QAM power and EVM
Lowest reference power	PDSCH/Data* QPSK EVM	I/Q diagram	RS power difference	Slot average power	
Highest reference power	PDSCH/Data* 16 QAM EVM	Modulation format	Antenna 0 RS power and EVM	Off power	PDSCH/Data* 64 QAM power and EVM
Abs power at defined range	PDSCH/Data* 64 QAM EVM	Frequency error		Transition period	PDSCH 256QAM EVM
	PDSCH 256QAM EVM			Time alignment error	
Rel power at defined range	Data EVM RMS	I/Q origin offset	Antenna 1 RS power and EVM	MBSFN*	Cell ID
		EVM RMS, EVM peak	Antenna 2 RS power and EVM**	PDSCH/Data* QPSK EVM	Frequency error
				PDSCH/Data* 16 QAM EVM	Time alignment error
					Antenna port
					Power Statistics CCDF
Option 049					
Channel Scanner (up to 6)	ID Scanner (up to 6)	Multipath Profile	Control Channel	EVM RSM, phase	Route Map
Frequency or channels	RSRP/RSRQ dominance	Cell, group, sector ID	RS power trend	Frequency error	RSRP
Cell, group, sector ID	S-SS RSSI dominance	Ant 0 RS Ec/Io, delay	Cell, group, sector ID	PMCH subframe power*	RSRQ
Channel power	S-SS Ec/Io dominance	Ant 1 RS Ec/Io, delay	Control channel table (P-SS, S-SS, PBCH, PC-FICH, RS 0, RS 1, RS 2**, RS 3**, MBSFN RS*)	Time alignment error	RS-SINR
RSRP/RSRQ	Cell, group, sector ID			Time offset	S-SS RSSI
RS-SINR	RSRP/RSRQ	Ant 3 RS Ec/Io**, delay**		Datagram	P-SS, S-SS power
Antenna port	RS-SINR/S-SS RSSI			Datagram	S-SS Ec/Io
	P-SS/S-SS power		Absolute power	Resource block power	
	S-SS Ec/Io		Relative power	Data utilization	

Longitude, latitude, and satellite in all screens

*Measurement is performed when MBMS is enabled.

**Measurement is performed when option 031 is enabled.

EMF Analyzer (Option 050)

General Parameters		
Supported Antenna	Isotropic Antenna G700050380 26 MHz to 3 GHz	
Mode	Sweep / FFT	
Trace	X-Axis, Y-Axis, Z-Axis, Current, Isotropic, Isotropic Accumulated	
Limit lines	MSL, ICNIRP	
Dwell Time	1 to 60s	
Measurement Time	1 to 30 min (# of measurement= Measurement Time / (Dwell Time x 3))	
Units	dB μ V/m, dBmV/m, dBV/m, V/m, W/m ² , dBm/m ² , dBW/m ² , A/m, dBA/m, and Watt/cm ² .	
Miscellaneous	Spectrum logging and Replay Export to CSV PDF Report Generation	
Measurement		
Option 050 and G700050380		
Trace: X-Axis, Y-Axis, Z-Axis, Current, Isotropic, Isotropic Accumulated	Isotropic EMF Power: AVG, Max, Min	Accumulated Isotropic EMF Power: AVG, Max, Min

RFoCPRI/Interference Analyzer (Options 008, 060, 061, 062, 063, 064, and 065)

General Parameters					
Optical interface	Dual SFP/SFP+ (supports all MSA-compliant SFP modules)				
Line rates	614.4 Mbps (1x) , 1228.8 Mbps (2x)	Option 008 and 060			
	2457.6 Mbps (4x)	Option 008 and 061			
	3072.0 Mbps (5x)	Option 008 and 062			
	4915.2 Mbps (8x)	Option 008 and 063			
	6144.0 Mbps (10x)	Option 008 and 064			
	9830.4 Mbps (16x)	Option 008 and 065			
Resolution Bandwidth (RBW)					
-3 dB bandwidth	1 kHz to 10 kHz (span ≤ 3.84 MHz)	1-3-10 sequence			
	1 KHz to 100 kHz (3.84 MHz < span < 30.86 MHz)				
Accuracy	±10% (nominal)				
VBW					
-3 dB bandwidth	1 Hz to 100 KHz	1-3-10 sequence			
Accuracy	±10% (nominal)				
CPRI Parameter					
IQ Sample width	4 – 20 (step 1)				
Mapping method	1 and 3				
TX clock	Internal/external/recovered				
Port type	Master/slave				
Map position	AxC#0 – AxC#7				
Bandwidth	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Measurements					
Layer-2 Monitoring		Layer-2 Term		Interference Analyzer	
Port 1	Port 2	Port 1 or 2 (exclusive)		Spectrum	Sound indicator, AM/FM audio demodulation, interference ID, spectrum recorder
LOS	LOS	LOS	SDI		
LOF	LOF	LOF	RAI		
SDI	SDI	Optic RX level	dBm	Spectrogram	Collect up to 72 hr of data
RAI	RAI	Protocol version	1 to 10		
Optic RX level	Optic RX level	C and M HDLC rate (kbps)	No HDLC, 240, 480, 960, 1920, 2400	RSSI	Collect up to 72 hr of data
SFP Information	SFP Information			Spectrum replay	X1, x2, x4, x8
Wavelength	Wavelength	C and M Ethernet subchannel number	20 to 63	PIM Detection	Single carrier Multi carrier PIM calculator
Vendor	Vendor				
Vendor PN	Vendor PN	Alarm Injection			
Vendor rev	Vendor rev	R-LOS	Single		
Power level type	Power level type	R-LOF	Single		
Diagnostic byte	Diagnostic byte	Error Injection			
Nominal rate	Nominal rate	Code	Single/rate		
Min rate	Min rate	K30.7	Single/rate		
Max RX level	Max RX level	Error rate	1E-3 to 1E-9		
Max TX level	Max TX level				

RFoBSAI™ Interference Analyzer (Options 070, 071, 072, and 073)

General Parameters					
Optical interface	Dual SFP/SFP+ (supports all MSA-compliant SFP modules)				
Line rates	768 Mbps (1x)	Option 070			
	1536 Mbps (2x)	Option 071			
	3072 Mbps (4x)	Option 072			
	6144 Mbps (8x)	Option 073			
Resolution Bandwidth (RBW)	1 kHz to 10 kHz (span ≤3.84 MHz) 1 KHz to 100 kHz (3.84 MHz < span ≤30.86 MHz)				
	Accuracy	±10% (nominal)			
Video bandwidth (RBW)	1 Hz to 100 KHz				
	Accuracy	±10% (nominal)			
RP3 type	LTE (FDD/TDD), UMTS (FDD)				
RP3 address	Hexadecimal				
TX clock	Internal/external/recovered				
Port type	Master/slave				
Bandwidth	LTE-FDD/TDD: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz UMTS: 3MHz for downlink, 5MHz for Uplink				
RP3 address list	RP3 address, technology, scrambler seed*, message count*				
Scrambler seed	Nx7 Index: 0 – 17, step 1				
Measurements					
Layer-2 Monitoring		Layer-2 Term		Interference Analyzer	
Port 1	Port 2	Port 1 or 2 (exclusive)		Spectrum	Sound indicator, AM/FM audio demodulation, interference ID, spectrum recorder
LOS	LOS	LOS			
LOF	LOF	LOF			
Code violation	Code violation	Optic RX level	dBm	Spectrogram	Collect up to 72 hr of data
K30.7 words	K30.7 words	Optic TX level	dBm		
Optic RX level	Optic RX level	Port Type	Master	RSSI	Collect up to 72 hr of data
Optic TX level	Optic TX level	TX state	State machine	Spectrum replay	X1, x2, x4, x8
Messages address	Message address	RX state	State machine	PIM Detection	Single carrier Multi carrier PIM calculator
Message counter	Message counter	TX address	RP3 address (hexadecimal)		
SFP Information	SFP Information	RX address	RP3 address (hexadecimal)		
Wavelength	Wavelength	Word sync loss event			
Vendor	Vendor	Code violation			
Vendor PN	Vendor PN	K30.7 words			
Vendor rev	Vendor rev	Frame sync loss events			
Power level type	Power level type	Alarm Injection			
Diagnostic byte	Diagnostic byte	K30.7	Single		
Nominal rate	Nominal rate	Error Injection			
Min rate	Min rate	Code	Single/rate		
Max RX level	Max RX level	Error rate	1E-3 to 1E-9		
Max TX level	Max TX level				

*Available only when the link rate is 6.1 Gbps.

RFoCPRI™ LTE-FDD Signal Generator (Option 081)

General Parameters		
Optical interface	Dual SFP/SFP+ (supports all MSA-compliant SFP modules)	
Link Rate	614.4 Mbps (1x), 1228.8 Mbps (2x), 2457.6 Mbps (4x), 3072.0 Mbps (5x), 4915.2 Mbps (8x), 6144.0 Mbps (10x), 9830.4 Mbps (16x)	
IQ Sample width	8 – 20 bits	
Mapping method	Packed and flexible	
Waveform	Off: CW On: LTE-FDD E-TM1.1, E-TM1.2, E-TM2, E-TM3.1, E-TM3.2, E-TM3.3	
Bandwidth	5/10/15/20 MHz	
Sampling Frequency	N x 3.84 MHz (N=2, 4, 6, 8)	
Gain dynamic range	0 to –50 dB	
Frequency error	±10 Hz + ref freq accuracy	99% confidence level
Residual EVM (RMS)	0.2% (typical)	Data EVM

RFoCPRI LTE-TDD Signal Generator (Option 082)

General Parameters		
Optical Hardware (Option 008)		
Optical interface	Dual SFP/SFP+ (supports all MSA-compliant SFP modules)	
CPRI Parameter		
Line coding	8B/10B	
Line rates	614.4 Mbps, 1228.8 Mbps (Option 060) 2457.6 Mbps (Option 061) 3072.0 Mbps (Option 062) 4915.2 Mbps (Option 063) 6144.0 Mbps (Option 064) 9830.4 Mbps (Option 065)	
CPRI Parameter		
IQ sample width	4 – 20 (step 1)	
Mapping method	1 and 3	
Waveform	CW, LTE-TDD E-TM1.1, E-TM1.2, E-TM2, E-TM3.1, E-TM3.2, E-TM3.3	
Bandwidth	5/10/15/20 MHz	
Sampling frequency	N x 3.84 MHz (N=2, 4, 6, 8)	
Gain dynamic range	0 to –50 dB	
Frequency error	±10 Hz + ref freq accuracy, 99% confidence level	
Residual EVM (RMS)	0.02% (typical), data EVM	

RFoBSAI™ LTE-FDD Signal Generator (Option 086)

General Parameters	
Optical Hardware (Option 008)	
Optical interface	Dual SFP/SFP+ (supports all MSA-compliant SFP modules)
OBSAI Parameter	
Line coding	8B/10B
Line rates	768 Mbps (Option 070) 1536 Mbps (Option 071) 3072 Mbps (Option 072) 6144 Mbps (Option 073)
CPRI Parameter	
RP3 type	LTE, UMTS
RP3 address	Hexadecimal
Waveform	CW, LTE-FDD E-TM1.1, E-TM1.2, E-TM2, E-TM3.1, E-TM3.2, E-TM3.3
Bandwidth	5/10/15/20 MHz
Sampling frequency	N x 3.84 MHz (N=2, 4, 6, 8)
Gain dynamic range	0 to -50 dB
Frequency error	±10 Hz + ref freq accuracy, 99% confidence level
Residual EVM (RMS)	0.02% (typical), data EVM

RFoCPRI LTE-FDD Signal Analyzer (Option 091)

General Parameters					
Optical interface	Dual SFP/SFP+ (supports all MSA-compliant SFP modules)				
Link rate	614.4 Mbps (1x), 1228.8 Mbps (2x), 2457.6 Mbps (4x), 3072.0 Mbps (5x), 4915.2 Mbps (8x), 6144.0 Mbps (10x), 9830.4 Mbps (16x)				
RBW	100 kHz				
IQ sample width	Uplink: 4 - 20 bits, downlink: 8 - 20 bits				
Mapping method	Packed and flexible				
AxC container/Carrier	Up to 8 AxC container per carrier				
LTE signal bandwidth	5/10/15/20 MHz				
Span	Fixed and equal to sampling frequency of LTE signal.				
Frequency error	±10 Hz + ref freq accuracy	99% confidence level			
Residual EVM (RMS)	0.02% (typical)	Data EVM			
Measurements					
Option 091					
Channel Power	Power vs. Time (frame)	Control Channel	Data EVM RMS, peak	Antenna 1 RS power and EVM	
Channel power	Frame average power	Control channel summary (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*)	RS EVM RMS, peak	Antenna 2 RS power and EVM	
Spectral density	Subframe power		Cell, group, sector ID		
Peak to average power	First slot power		Frame		
Occupied Bandwidth	Second slot power		MBSFN*		Data Allocation Map
Occupied bandwidth	Cell ID, I/Q origin offset	EVM, relative or absolute power, modulation type	Frame summary table (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/Data* QPSK, PDSCH/Data* 16 QAM, PDSCH/Data* 64 QAM)	Data allocation vs frame	
Integrated power	Time offset	Each control channels'		Resource block power	
Occupied power	Constellation			I/Q diagram	OFDM symbol power
	MBSFN*	Modulation format		Data utilization	
	RS TX power	Frequency error		Data allocation vs subframe	
	PDSCH/data* QPSK EVM			Resource block power	
	PDSCH/data* 16 QAM EVM	I/Q origin offset	EVM, relative or absolute power, modulation type	Data utilization	
	PDSCH/data* 64 QAM EVM	EVM RMS, EVM peak		Power Statistics CCDF	
	Data EVM RMS	Subframe	Frame average power		
	Data EVM peak	MBSFN*	OFDM symbol power		
	Frequency error	Subframe summary table (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/data* QPSK, PDSCH/data* 16 QAM, PDSCH/data* 64 QAM)	Frequency error		
	Time error		I/Q origin offset		
	Data Channel		EVM RMS, peak		
	MBSFN*		Data EVM RMS, peak		
	Resource block power		Cell, group, sector ID		
	I/Q diagram		Time Alignment Error		
	RB power modulation format		EVM, relative or absolute power, modulation type	Time alignment error trend	
				Time alignment error	
	I/Q origin offset		Subframe power	RS power difference	
	EVM RMS, EVM peak		OFDM symbol power	Antenna 0 RS power and EVM	
		Frequency, time error			

RFoCPRI LTE-TDD Analyzer (Option 092)

General Parameters			
Optical Hardware (Option 008)			
Interface	Dual SFP/SFP+ (supports all MSA-compliant SFP modules)		
CPRI Parameter			
Line coding	8B/10B		
Line rates	614.4 Mbps, 1228.8 Mbps (Option 060) 2457.6 Mbps (Option 061) 3072.0 Mbps (Option 062) 4915.2 Mbps (Option 063) 6144.0 Mbps (Option 064) 9830.4 Mbps (Option 065)		
Resolution Bandwidth (RBW)			
-3 dB bandwidth	100 kHz		
Accuracy	±10% (nominal)		
CPRI Parameter			
IQ sample width	4 – 20 (step 1)		
Mapping method	1 and 3		
TX clock	Internal/external/recovered		
Port type	Master/slave		
Map position	AxC#0 – AxC#7		
Bandwidth	5/10/15/20 MHz		
Span	Fixed and equal to sampling frequency of LTE signal		
Frequency error	±10 Hz + ref freq accuracy, 99% confidence level		
Residual EVM (RMS)	0.02% (typical), Data EVM		
Measurements			
Option 92			
Channel Power	Constellation	Subframe	Data Allocation Map
Channel power	MBSFN*	MBSFN*	Data allocation vs. frame
Spectral density	RS TX Power	Subframe Summary	Resource block power
Peak to average power	PDSCH/data* QPSK EVM	EVM, Abs. and Rel. power	OFDM symbol power
Occupied bandwidth	PDSCH/data* 16QAM EVM	Subframe power	Data utilization
Occupied bandwidth	PDSCH/data* 64QAM EVM	OFDM symbol power	Data allocation vs I
Integrated Power	Data EVM RMS, peak	Frequency error	Resource block power
Occupied power	Frequency error	Time error	Data utilization
Power vs. Time (Frame)	Time error	Data EVM RMS, peak	Power Statistics CCDF
Frame average power	Control Channel	RS EVM RMS, peak	Average power
Subframe power	Control channel summary	Cell, group, sector ID	Peak power crest factor
First Slot power	EVM, Rel or Abs power of each control channel	Time Alignment Error	
Second slot power		Time alignment error trend	
Cell ID, I/Q origin offset	IQ Diagram	Time alignment error	
Time offset	Modulation format	RS power difference	
Power vs. Time (Slot)	Frequency error	Antenna 0 RS power, EVM	
Slot average power	I/Q origin offset	Antenna 1 RS power, EVM	
Transient period length	Control EVM RMS, peak	Antenna 2 RS power, EVM **	
Off power	Data Channel	Antenna 3 RS power, EVM **	
	MBSFN*	Cell, group, sector ID	
	Resource block power		
	I/Q diagram		
	RB power		
	Modulation format		
	I/Q origin offset		
	EVM RMS, peak		

Longitude, latitude, and satellite in all screens

RFoOBSAI LTE-FDD Analyzer (Option 096)

General Parameters			
Optical Hardware (Option 008)			
Interface	Dual SFP/SFP+ (supports all MSA-compliant SFP modules)		
OBSAI Parameter			
Line coding	8B/10B		
Line rates	768 Mbps (Option 070) 1536 Mbps (Option 071) 3072 Mbps (Option 072) 6144 Mbps (Option 073)		
Resolution Bandwidth (RBW)			
-3 dB bandwidth	100 kHz		
Accuracy	±10% (nominal)		
OBSAI Parameter			
RP3 type	LTE (FDD/TDD), UMTS (FDD)		
RP3 address	Hexadecimal		
TX clock	Internal/external/recovered		
Port type	Master/slave		
Bandwidth	LTE-FDD/TDD: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz UMTS: 3 MHz for downlink, 5 MHz for uplink		
RP3 address list	RP3 address, technology, scrambler seed*, message count*		
Scrambler seed	Nx7 index: 0 – 17, step 1		
Measurements			
Option 96			
Channel Power	Constellation	Subframe	Frame
Channel power	MBSFN*	MBSFN*	MBSFN*
Spectral density	RS TX power	Subframe summary	Frame summary
Peak to average power	PDSCH/data* QPSK EVM	EVM, Abs. and Rel. power	EVM, Abs. and Rel. power
Occupied bandwidth	PDSCH/data* 16 QAM EVM	Subframe power	Frame average power
Occupied bandwidth	PDSCH/data* 64 QAM EVM	OFDM symbol power	OFDM symbol power
Integrated Power	Data EVM RMS, peak	Frequency error	Frequency error
Occupied power	Frequency error	Time error	IQ origin offset
Power vs. Time (Frame)	Time error	Data EVM RMS, peak	Data EVM RMS, peak
Frame average power	Control Channel	RS EVM RMS, peak	Control EVM RMS, peak
Subframe power	Control channel summary	Cell, group, sector ID	Cell, group, sector ID
First Slot power	EVM, Rel or Abs power of each control channel	Time Alignment Error	Data Allocation Map
Second slot power		Time alignment error trend	Data allocation vs. frame
Cell ID, I/Q origin offset	I/Q Diagram	Time alignment error	Resource block power
Time offset	Modulation format	RS power difference	OFDM symbol power
Power Statistics CCDF	Frequency error	Antenna 0 RS power, EVM	Data utilization
Average power	I/Q origin offset	Antenna 1 RS power, EVM	Data allocation vs. subframe
Peak power crest factor	Control EVM RMS, peak	Antenna 2 RS power, EVM **	Resource block power
	Data Channel	Antenna 3 RS power, EVM **	Data Utilization
	MBSFN*	Cell, group, sector ID	
	Resource block power		
	I/Q diagram		
	RB power		
	Modulation format		
	I/Q origin offset		
	EVM RMS, peak		

Longitude, latitude, and satellite in all screens

RFoCPRI BBU Emulation for Alcatel-Lucent (Option 101)

General Parameters			
Optical Hardware (Option 008)			
Interface	Dual SFP/SFP+ (supports all MSA-compliant SFP modules)		
CPRI Parameter			
Line coding	8B/10B		
Line rates	614.4 Mbps, 1228.8 Mbps (Option 060) 2457.6 Mbps (Option 061) 3072.0 Mbps (Option 062) 4915.2 Mbps (Option 063) 6144.0 Mbps (Option 064) 9830.4 Mbps (Option 065)		
Resolution Bandwidth (RBW)			
-3 dB bandwidth	1 kHz to 10 kHz (span \leq 3.84 MHz) 1 KHz to 100 kHz (3.84 MHz < span \leq 30.86 MHz)		
Accuracy	\pm 10% (nominal)		
CPRI parameter			
IQ Sample width	4 – 20 (step 1)		
Mapping method	1 and 3		
TX clock	Internal/external		
Port type	Master		
Bandwidth	5/10/15/20 MHz		
Span	Adjustable (max span= sampling frequency)		
Measurements			
Option 101			
<i>Carrier Configuration</i>	<i>SFP Information</i>	<i>Spectrum Clearance</i>	<i>Coverage Range</i>
RRH description	RRH description	Spectrum	Spectrum
Carrier information	SFP information	Spectrogram	Carrier information
<i>CPRI and Active SW</i>	<i>Profile Editor</i>	RSSI	VSWR
RRH description		Dual spectrum	Tilt
CPRI state		Dual active trace	<i>PIM Analysis</i>
Active SW		Dual spectrogram	Single radio
			Spectrum
			Flatness

General Information

Inputs and Outputs		
RF In	Spectrum analyzer	
Connector	Type-N, female	
Impedance	50 Ω (nominal)	
Damage level	>+40 dBm, ±50 V DC (nominal)	
Reflection/RF Out	Cable and antenna analyzer	
Connector	Type-N, female	
Impedance	50 Ω (nominal)	
Damage level	>+37 dBm, ±50 V DC (nominal)	
RF In	Cable and antenna analyzer	
Connector	Type-N, female	
Impedance	50 Ω (nominal)	
Damage level	>+25 dBm, ±50 V DC (nominal)	
External Trigger, GPS		
Connector	SMA, female	
Impedance	50 Ω (nominal)	
External Ref		
Connector	SMA, female	
Impedance	50 Ω (nominal)	
Input frequency	10 MHz, 13 MHz, 15 MHz	
Input range	-5 to +5 dBm	
USB		
USB host ¹	Type A, 1 port	
USB client ²	Type B, 1 port	
SFP Cage		
Port 1	RFoFiber (with option 008)	
Port 2	SFP/SFP+ compatible	
LAN	RJ45, 10/100Base-T	
Audio jack	3.5 mm headphone jack	
External power	5.5 mm barrel connector	
Speaker	Built-in speaker	
Display		
Type	Resistive touch screen	
Size	8 inch, LED backlight, transfective LCD with anti-glare coating	
Power		
External DC input	18 to 19 V DC	
Power consumption	42 W	54 W maximum (when charging battery)

Battery		
Type	10.8 V, 7800 mA/hr (Lithium ion)	
Operating time	>3 hr (typical at spectrum analyzer)	
Charge time	3 hr (while not operating) 9 hr (while operating)	
Charging temperature	0 to 45°C (32 to 104°F) ≤85% RH	
Discharging temperature	-20 to 55°C (4 to 131°F) ≤85% RH	
Storage temperature ³	0 to 25°C (32 to 77°F)	
Data Storage		
Internal ⁴	Maximum 512 MB	
External ⁵	Up to 32 GB with FAT32 format	
Environmental		
Operating Temperature		
AC power	0 to 40°C (32 to 104°F) with no derating	
Battery	0 to 40°C (32 to 104°F) at charging -10 to 55°C (14 to 131°F) at discharging -10 to 50°C (14 to 122°F) at discharging with Option 008	
Maximum humidity	95% RH (noncondensing)	
Shock and vibration	MIL-PRF-28800F class 2	
Storage temperature ⁶	-30 to 71°C (-22 to 160°F)	
EMC		
IEC/EN 61326-1:2013 (complies with European EMC)		
CISPR11:2009 +A1:2010		
ESD		
IEC/EN 61000-4-2		
Size and Weight (standard configuration)		
Weight (with battery)	Standard	4.17 kg (9.19 lb)
	Fully loaded	4.34 kg (9.57 lb)
Size (W x H x D)	295 x 195 x 82 mm	
Warranty		
3 years		
Calibration Cycle		
1 year		

1. Connects flash drive, power sensor, EZ-Cal kit, and fiber microscope.
2. Connects to PC for data transfer.
3. 20 to 85% RH, store battery pack in low-humidity environment; extended exposure to temperature above 45°C could significantly degrade battery performance and life.
4. Up to 3800 traces.
5. Supports USB 2.0 compatible memory devices.
6. With the battery pack removed.

Ordering Information

Description	Part Number
Standard CellAdvisor Base Station Analyzer	
Base station analyzer includes: Spectrum analyzer 100 kHz to 4 GHz RF power meter 10 MHz to 4 GHz Cable and antenna 5 MHz to 4 GHz	JD745B ^{1,2}
Options	
NOTE: Upgrade options for the JD745B use the designation JD745BU before the respective last three-digit option number.	
2 Port transmission measurements for JD745B ³	JD745B001
Bias Tee for JD745B ⁴	JD745B002
CW signal generator for JD745B	JD745B003
Optical hardware for JD745B ⁵	JD745B008
GPS receiver and antenna for JD745B	JD745B010
Interference analyzer for JD745B ^{6,7}	JD745B011
Channel scanner for JD745B	JD745B012
Bluetooth connectivity for JD745B ⁸	JD745B013
LTE-FDD RAN performance indicator for JD745B ⁹	JD745B014
LTE-TDD RAN performance indicator for JD745B ¹⁰	JD745B015
Wi-Fi connectivity for JD745B ¹¹	JD745B016
cdmaOne/cdma2000 analyzer for JD745B	JD745B020
EV-DO analyzer for JD745B ¹²	JD745B021
GSM/GPRS/EDGE analyzer for JD745B	JD745B022
WCDMA/HSPA+ analyzer for JD745B	JD745B023
TD-SCDMA analyzer for JD745B	JD745B025
Mobile WiMAX analyzer for JD745B	JD745B026
LTE - FDD analyzer for JD745B ¹³	JD745B028
LTE - TDD analyzer for JD745B ¹³	JD745B029
LTE Advanced - FDD analyzer for JD745B ^{14,15}	JD745B030
LTE Advanced - TDD analyzer for JD745B ^{15,16}	JD745B031
LTE-FDD 256 QAM Demodulator for JD745B ¹⁷	JD745B032
LTE-TDD 256 QAM Demodulator for JD745B ¹⁸	JD745B033
cdmaOne/cdma2000 OTA analyzer for JD745B ¹⁹	JD745B040
EV-DO OTA analyzer for JD745B ¹⁹	JD745B041
GSM/GPRS/EDGE OTA analyzer for JD745B ¹⁹	JD745B042
WCDMA/HSPA+ OTA analyzer for JD745B ¹⁹	JD745B043
TD-SCDMA OTA analyzer for JD745B ¹⁹	JD745B045
Mobile WiMAX OTA analyzer for JD745B ¹⁹	JD745B046
LTE - FDD OTA analyzer for JD745B ¹⁹	JD745B048
LTE - TDD OTA analyzer for JD745B ¹⁹	JD745B049
EMF analyzer for JD745B ²⁰	JD745B050
RFoCPRI 614M & 1.2G interference analyzer for JD745B ^{21,22}	JD745B060
RFoCPRI 2.4G interference analyzer for JD745B ^{21,22}	JD745B061
RFoCPRI 3.1G interference analyzer for JD745B ^{21,22}	JD745B062
RFoCPRI 4.9G interference analyzer for JD745B ^{21,22}	JD745B063
RFoCPRI 6.1G interference analyzer for JD745B ^{21,22}	JD745B064
RFoCPRI 9.8G interference analyzer for JD745B ^{21,22}	JD745B065
RFoBSAI 768M Interference analyzer for JD745B ^{21,22}	JD745B070
RFoBSAI 1.5G interference analyzer for JD745B ^{21,22}	JD745B071
RFoBSAI 3.1G interference analyzer for JD745B ^{21,22}	JD745B072

Description	Part Number
RFoBSAI 6.1G interference analyzer for JD745B ^{21,22}	JD745B073
RFoCPRI LTE-FDD signal generator for JD745B ^{21,22,23}	JD745B081
RFoCPRI LTE-TDD signal generator for JD745B ^{21,22,23}	JD745B082
RFoBSAI LTE-FDD signal generator for JD745B ^{21,22,24}	JD745B086
RFoCPRI LTE-FDD signal analyzer for JD745B ^{21,22,23}	JD745B091
RFoCPRI LTE-TDD signal analyzer for JD745B ^{21,22,23}	JD745B092
RFoBSAI LTE-FDD signal analyzer for JD745B ^{21,22,24}	JD745B096
ALU BBU emulation for JD745B ^{21,22}	JD745B101
2 port transmission measurements floating license for JD740B/JD780B	JD780B001-FL
GPS receiver and antenna floating license for JD740B/JD780B	JD780B010-FL
Interference analyzer floating license for JD740B/JD780B	JD780B011-FL
Channel scanner floating license for JD740B/JD780B	JD780B012-FL
Bluetooth connectivity floating license for JD740B/JD780B	JD780B013-FL
LTE-FDD RAN performance indicator floating license for JD740B/JD780B	JD780B014-FL
LTE-TDD RAN performance indicator floating license for JD740B/JD780B	JD780B015-FL
Wi-Fi connectivity floating license for JD740B/JD780B	JD780B016-FL
cdmaOne/cdma2000 analyzer floating license for JD740B/JD780B	JD780B020-FL
EV-DO analyzer floating license for JD740B/JD780B	JD780B021-FL
GSM/GPRS/EDGE analyzer floating license for JD740B/JD780B	JD780B022-FL
WCDMA/HSPA+ analyzer floating license for JD740B/JD780B	JD780B023-FL
TD-SCDMA analyzer floating license for JD740B/JD780B	JD780B025-FL
Mobile WiMAX analyzer floating license for JD740B/JD780B	JD780B026-FL
LTE - FDD analyzer floating license for JD740B/JD780B	JD780B028-FL
LTE - TDD analyzer floating license for JD740B/JD780B	JD780B029-FL
LTE Advanced - FDD analyzer floating license for JD740B/JD780B	JD780B030-FL
LTE Advanced - TDD analyzer floating license for JD740B/JD780B	JD780B031-FL
LTE-FDD 256 QAM Demodulator floating license for JD740B/JD780B	JD780B032-FL
LTE-TDD 256 QAM Demodulator floating license for JD740B/JD780B	JD780B033-FL
cdmaOne/cdma2000 OTA analyzer floating license for JD740B/JD780B	JD780B040-FL
EV-DO OTA analyzer floating license for JD740B/JD780B	JD780B041-FL
GSM/GPRS/EDGE OTA analyzer floating license for JD740B/JD780B	JD780B042-FL
WCDMA/HSPA+ OTA analyzer floating license for JD740B/JD780B	JD780B043-FL
TD-SCDMA OTA analyzer floating license for JD740B/JD780B	JD780B045-FL
Mobile WiMAX OTA analyzer floating license for JD740B/JD780B	JD780B046-FL

Ordering Information (Continued)

Description	Part Number
LTE - FDD OTA analyzer floating license for JD740B/JD780B	JD780B048-FL
LTE - TDD OTA analyzer floating license for JD740B/JD780B	JD780B049-FL
EMF analyzer floating license for JD740B/JD780B	JD780B050-FL
RFoCPRI 614M & 1.2G interference analyzer floating license for JD740B/JD780B	JD780B060-FL
RFoCPRI 2.4G interference analyzer floating license for JD740B/JD780B	JD780B061-FL
RFoCPRI 3.1G interference analyzer floating license for JD740B/JD780B	JD780B062-FL
RFoCPRI 4.9G interference analyzer floating license for JD740B/JD780B	JD780B063-FL
RFoCPRI 6.1G interference analyzer floating license for JD740B/JD780B	JD780B064-FL
RFoCPRI 9.8G interference analyzer floating license for JD740B/JD780B	JD780B065-FL
RFoBSAI 768M interference analyzer floating license for JD740B/JD780B	JD780B070-FL
RFoBSAI 1.5G interference analyzer floating license for JD740B/JD780B	JD780B071-FL
RFoBSAI 3.1G interference analyzer floating license for JD740B/JD780B	JD780B072-FL
RFoBSAI 6.1G interference analyzer floating license for JD740B/JD780B	JD780B073-FL
RFoCPRI LTE-FDD signal generator floating license for JD740B/JD780B	JD780B081-FL
RFoCPRI LTE-TDD signal generator floating license for JD740B/JD780B	JD780B082-FL
RFoBSAI LTE-FDD signal generator floating license for JD740B/JD780B	JD780B086-FL
RFoCPRI LTE-FDD signal analyzer floating license for JD740B/JD780B	JD780B091-FL
RFoCPRI LTE-TDD signal analyzer floating license for JD740B/JD780B	JD780B092-FL
RFoBSAI LTE-FDD signal analyzer floating license for JD740B/JD780B	JD780B096-FL
ALU BBU emulation floating license for JD740B/JD780B	JD780B101-FL
Optional Accessories	
Accessory — RF Calibrators (General)	
Y- calibration kit Type-N(m), DC to 4 GHz, 50 ohm	JD72450509
Y- calibration kit DIN(m), DC to 4 GHz, 50 ohm	JD72450510
Y- calibration kit Type-N(m), DC to 6 GHz, 50 ohm	JD78050509
Y- calibration kit DIN(m), DC to 6 GHz, 50 ohm	JD78050510
EZ-Cal kit Type-N(m), DC to 6 GHz, 50 ohm	JD70050509
Dual port Type-N 4 GHz calibration kit	JD71050507
Dual port DIN 4 GHz calibration kit	JD71050508
Dual port Type-N 6 GHz calibration kit	JD78050507
Dual port DIN 6 GHz calibration kit	JD78050508
50 ohm Load, DC to 4 GHz, 1 W	GC72550511
Accessory - RF Cables (Cables)	
RF cable DC to 8 GHz Type-N(m) to Type-N(m), 1.0 m	G700050530

Description	Part Number
RF cable DC to 8 GHz Type-N(m) to Type-N(f), 1.5 m	G700050531
RF cable DC to 8 GHz Type-N(m) to Type-N(f), 3.0 m	G700050532
RF cable DC to 18 GHz Type-N(m) to SMA(m), 1.5 m	G710050533
RF cable DC to 18 GHz Type-N(m) to QMA(m), 1.5 m	G710050534
RF cable DC to 18 GHz Type-N(m) to SMB(m), 1.5 m	G710050535
RF cable DC to 6 GHz Type-N(m) to DIN(f), 1.5 m	G710050536
RF cable DC to 4 GHz Type-N(m) to 1.0/2.3 (m), 1.5 m	G710050537
Phase-stable RF cable w grip DC to 6 GHz Type-N(m) to Type-N(f), 1.5 m	G700050540
Phase-stable RF cable w grip DC to 6 GHz Type-N(m) to DIN(f), 1.5 m	G700050541
RF cable DC to 18 GHz Type-N(m) to Type-N(f), 1.5 m	G710050531
Accessory - Optic Cables (Cables)	
SM/LC T-Jumper and 1.5 m fiber cable ²⁹	G700050401
MM/LC T-Jumper and 1.5 m fiber cable ²⁹	G700050402
Accessory - RF Antennas (General)	
RF omni antenna Type-N(m), 806 to 896 MHz ³⁰	G700050353
RF omni antenna Type-N(m), 870 to 960 MHz ³⁰	G700050354
RF omni antenna Type-N(m), 1710 to 2170 MHz ³⁰	G700050355
RF omni antenna Type-N(m), 720 to 800 MHz ³⁰	G700050356
RF omni antenna Type-N(m), 2300 to 2700 MHz ³⁰	G700050357
Mag mount RF omni antenna Type-N(m), 689 to 1200 MHz, 1700 to 2700 MHz, 3000 to 6000 MHz ³⁰	G700050358
RF yagi antenna Type-N(f), 1750 to 2390 MHz, 10.2 dBd ^{30,31}	G700050363
RF yagi antenna Type-N(f), 806 to 896 MHz, 10.2 dBd ^{30,31}	G700050364
RF yagi antenna Type-N(f), 866 to 960 MHz, 9.8 dBd ^{30,31}	G700050365
RF yagi antenna SMA(f), 700 to 4000 MHz, 1.85 dBd ^{30,31}	G700050366
RF yagi antenna SMA(f), 700 to 6000 MHz, 2.85 dBd ^{30,31}	G700050367
Isotropic Antenna Type-N(m), 26 MHz to 3 GHz ³²	G700050380
Accessory - RF Power Sensor (General)	
Directional power sensor (peak and average power) 300 to 3800 MHz	JD731B
Terminating power sensor (Average Power) 20 to 3800 MHz	JD732B
Directional power sensor (peak and average power) 150 to 3500 MHz	JD733A
Terminating power sensor (peak power) 20 to 3800 MHz	JD734B
Terminating power sensor (average/peak power) 20 to 3800 MHz	JD736B
Accessory - RF Adapters (Connector & Adapters)	
Adapter Type-N(m) to DIN(f), DC to 7.5 GHz, 50 ohm	G700050571
Adapter DIN(m) to DIN(m), DC to 7.5 GHz, 50 ohm	G700050572
Adapter Type-N(m) to SMA(f) DC to 18 GHz, 50 ohm	G700050573
Adapter Type-N(m) to BNC(f), DC to 4 GHz, 50 ohm	G700050574
Adapter Type-N(f) to Type-N(f), DC to 18 GHz 50 ohm	G700050575
Adapter Type-N(m) to DIN(m), DC to 7.5 GHz, 50 ohm	G700050576
Adapter Type-N(f) to DIN(f), DC to 7.5 GHz, 50 ohm	G700050577
Adapter Type-N(f) to DIN(m), DC to 7.5 GHz, 50 ohm	G700050578
Adapter DIN(f) to DIN(f), DC to 7.5 GHz, 50 ohm	G700050579

Ordering Information (Continued)

Description	Part Number
Adapter Type-N(m) to Type-N(m), DC to 11 GHz 50 ohm	G700050580
Adapter N(m) to QMA(f), DC to 6.0 GHz, 50 ohm	G700050581
Adapter N(m) to QMA(m), DC to 6.0 GHz, 50 ohm	G700050582
Adapter N(m) to 4.1/9.5 MINI DIN (f), DC to 6.0 GHz, 50 ohm	G700050583
Adapter N(m) to 4.1/9.5 MINI DIN (m), DC to 6.0 GHz, 50 ohm	G700050584
Adapter N(m) to 4.3-10 (f), DC to 6.0 GHz, 50 ohm	G700050585
Adapter N(m) to 4.3-10 (m), DC to 6.0 GHz, 50 ohm	G700050586
Adapter Type-N(m) to DIN(f), DC to 4 GHz, 50 ohm	G710050571
Adapter N(f) to N(f), DC to 4 GHz, 50 ohm	G710050575
Adapter Type-N(f) to DIN(f), DC to 4 GHz, 50 ohm	G710050577
Adapter Type-N(f) to DIN(m), DC to 7 GHz, 50 ohm	G710050578
Accessory - RF Miscellaneous (General)	
Attenuator 40 dB, 100 W, DC to 4 GHz (unidirectional)	G710050581
RF directional coupler, 700 to 4000 MHz, 30 dB, 50 W Input/output; Type-N(m) to Type-N(f), tap off; Type-N(f) ³³	G710050585
RF combiner, 700 to 4000 MHz, Type-N(f) to Type-N(m) ³³	G710050586
4x1 RF combiner, 700 to 4000 MHz, Type-N(f) to Type-N(m) ³⁴	G710050587
Bandpass filter 696 MHz to 716 MHz, N(m) to N(f), 50 ohm	G700050601
Bandpass filter 776 MHz to 788 MHz, N(m) to N(f), 50 ohm	G700050602
Bandpass filter 806 MHz to 849 MHz, N(m) to N(f), 50 ohm	G700050603
Bandpass filter 1710 MHz to 1755 MHz, N(m) to N(f), 50 ohm	G700050604
Bandpass filter 1850 MHz to 1910 MHz, N(m) to N(f), 50 ohm	G700050605
Accessory - General	
USB Bluetooth dongle and dipole antenna 5 dBi	JD70050006
GPS antenna for JD740 and JD780 series	JD71050351
AntennaAdvisor handle ³⁵	JD70050007
Cross LAN cable (6ft)	G700550335
USB A to B cable (1.8m)	GC73050515
> 1GB USB memory	GC72450518
Stylus pen	G710550316
Accessory - Battery & Chargers	
Rechargeable lithium ion battery	G710550325
JD700B series AC/DC power adapter_90 W15 V	JD70050326
Automotive cigarette lighter/12V DC adapter	G710550323
External battery charger	G710550324
Accessory - Manual & Documentation	
JD700B series user's guide - printed version	JD700B362
Accessory - Carrying Case	
Soft carrying case	JD74050341
Hard carrying Case	JD71050342
Hard carrying case with wheels	JD70050342

Description	Part Number
CellAdvisor backpack carrying case	JD70050343
Optional TAP	
Optical nTAP, three-channel, 50 µm, MM, LC, 50/50 split ratio	TO3-M5-LC-55-K
Optical nTAP, three-channel, 9 µm, SM, LC, 50/50 split ratio	TO3-SM-LC-55-K
Optional SFP Transceiver	
SFP 4G/2G/1G Fibre Channel & 1G Ethernet, 850nm, 150-500m, SX ³⁰	CSFP-4G-8-1
SFP 4G/ 2G/ 1G Fibre Channel & 1G Ethernet, 1310nm, 5km, LX ³⁰	CSFP-4G-3-1
SFP 4G/2G/1G Fibre Channel & 1G Ethernet, 1310nm, 20km, LX ³⁰	CSFP-4G-3-2
SFP+ 8G/4G/2G Fibre Channel, 6G/4.9G CPRI 850 nm MM Multirate ³¹	CSFP-PLUS-8G-8-1
SFP+ 8G/4G/2G Fibre Channel, 6G/4.9G CPRI 1310nm SM, 10km ³¹	CSFP-PLUS-8G-3-1
SFP+ 1G/10G Ethernet, 1G/10G Fiber Channel & 9.8G CPRI, 850nm, MM, 300m ³²	SFPPLUS-1GE-10GE-8-1
SFP+ 1G/10G Ethernet, 1G/10G Fiber Channel & 9.8G CPRI, 1310nm, SM, 10km ³²	SFPPLUS-1GE-10GE-3-1
Optional StrataSync™	
StrataSync for CellAdvisor BSA - Asset Management-1 Yr.	SS-CA-BSA-AM-01
StrataSync for CellAdvisor BSA - Asset Management-2 Yr.	SS-CA-BSA-AM-02
StrataSync for CellAdvisor BSA - Asset Management-3 Yr.	SS-CA-BSA-AM-03
StrataSync for CellAdvisor BSA - Test Data Management-1 Yr	SS-CA-BSA-TDM-01
StrataSync for CellAdvisor BSA - Test Data Management-2 Yr	SS-CA-BSA-TDM-02
StrataSync for CellAdvisor BSA - Test Data Management-3 Yr	SS-CA-BSA-TDM-03
Optical Power Meters and Fiber Microscope Kits	
USB optical power meter with software, 2.5 and 1.25 mm interfaces, 30-inch USB extender, and carry- ing pouch	MP-60A
USB optical power meter — high power, with software, 2.5 and 1.25 mm interfaces, 30-inch USB extender, and carrying pouch	MP-80A
KIT: FBP-P5000i digital probe, FiberChekPRO software, case, and four tips	FBP-SD101
KIT: FBP-P5000i digital probe, FiberChekPRO software, case, and seven tips	FBP-MTS-101
KIT: FBP-P5000i digital probe, MP-60A USB power meter, FiberChekPRO software, case, tips, and adapters	FIT-SD103
KIT: FBP-P5000i digital probe, MP-60A USB power meter, FiberChekPRO software, case, tips, adapters, and cleaning materials	FIT-SD103-C
KIT: FBP-P5000i digital probe, MP-80A USB power meter, FiberChekPRO software, case, tips, and adapters	FIT-SD113

1. Supplied accessories: User's Guide, USB Memory (1GB), Cross LAN Cable, USB Cable, DC car adapter, Li-Ion Battery, AC/DC adapter, Stylus Pen
2. Highly recommended using the Calibration Kit (JD78050509, JD78050510, JD70050509)
3. Highly recommended using the Calibration Kit (JD78050507, JD78050508) and Bias Tee (option 002)
4. Requires option 001
5. Needs for RfOFIBER options 060,061,062,063,064,065,070,071,072,073,081,091,092,096,101
6. Needs Omni or Yagi antenna
7. Highly recommended adding option 010
8. Includes a Bluetooth USB dongles with 5 dBi dipole antennas (JD70050006)
9. Requires option 013 and option 028 and Needs TrueSite(FTA)
10. Requires option 013 and option 029 and Needs TrueSite(FTA)
11. Includes a Wi-Fi USB dongle
12. Requires option 020
13. Highly recommended using the RF Directional Coupler or RF combiner (G710050585 or G710050586)
14. Requires option 028
15. Highly recommended using the 4x1 RF combiner (G710050587)
16. Requires option 029
17. Requires option 030
18. Requires option 031
19. Requires option 010
20. Requires G700050380
21. Requires option 008, Including Layer2 Term and Monitoring
22. Needs proper SFP/SFP+ Transceiver and Optical Tap or thur mode fiber cable (G700050401 or G700050402)
23. Requires at least one of RfOCPRI Interference Analyzer options (option 060 to 065), needs each of the respective/corresponding Interference Analyzer line rate
24. Requires at least one of RfOBSAI Interference Analyzer options (option 070 to 073), needs each of the respective/corresponding Interference Analyzer line rate
25. Includes G700050358, Android Tablet (Galaxy Tab S2), Car Mount Kit, 1x2 USB Hub, Accessory Soft carrying case
26. Requires option 016
27. Requires factory return for the upgrade
28. Requires serial number for placing an order of the upgrade
29. Needs for RfOFIBER measurements (060,061,062,063,064,065,070,071,072,073,081,091,092,096,101)
30. Needs for OTA/Interference measurements (options 011/040, 041, 042, 043, 044, 045, 046, 048, 049)
31. Needs Proper RF Cables for the inter-connection
32. Needs option 050
33. Needs for LTE measurement (option 028, 029)
34. Needs for LTE-A measurement (option 030, 031)
35. Needs G700050366 or G700050367



Contact Us **+1 844 GO VIAVI**
(+1 844 468 4284)

To reach the Viavi office nearest you,
visit viavisolutions.com/contacts.

© 2016 Viavi Solutions Inc.
Product specifications and descriptions in this
document are subject to change without notice.
jd745bbsaspec-ds-nsd-nse-ae
30176035 902 0616