


# BULK CURRENT INJECTION

The F-120-9A has been designed to extend the use of conducted immunity testing over the bandwidth of 10 kHz – 230 MHz. The useable frequency range is 10 kHz - 230 MHz with an insertion loss of less than 8 dB between 150 kHz – 200 MHz. The input power rating is 100 watts for 30 minutes.



# F - 120-9A

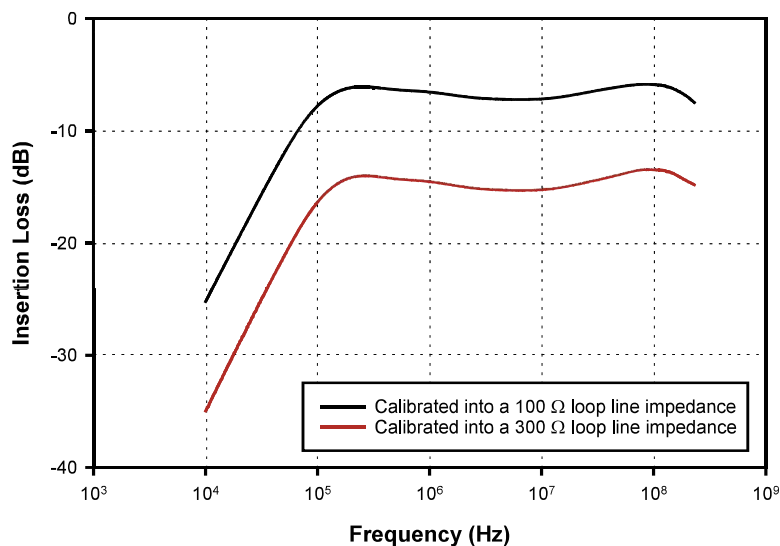

## Specifications

Frequency: 10 kHz – 230 MHz  
Inner diameter: 40 mm  
Outer diameter: 127 mm  
Height: 134 mm  
Input Power rating: 100 watts

## Accessories

FCC-BCICF-6-150 • Calibration Fixture  
Bandwidth: 150 kHz – 230 MHz  
F-52B • Current Probe  
Bandwidth: 10 kHz – 400 MHz

# FCC

Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502  
Phone: 310-303-3300  
Email: [sales@fischercc.com](mailto:sales@fischercc.com)

© Fischer Custom Communications, Inc.