

FL7218 Electric Field Probe

- 2MHz-18GHz
- 2-1000 V/m
- User-selectable X, Y, Z Axes



Features


The FL7218 is a smart, fast, extremely accurate electric field probe that contains an internal microprocessor to provide linearization, temperature compensation, control, and communication functions. Noise reduction and temperature compensation allow accurate measurements down to 2 V/m without zero adjustment. Microprocessor based linearization provides a 54 dB dynamic range. When rotated about its ortho angle mount, the probe provides isotropic response of ± 1.5 dB to 18 GHz.

The FL7218 is laser powered to allow for continuous operation without recharging or battery replacement. This probe requires an FI7000 for power and communication. FM7004A is recommended for local monitoring and control.


Correction factors are provided with the probe. These factors can be loaded into the Model FM7004A Field Monitor (sold separately) to automatically correct the probe readings at user-specified frequencies. When correction factors are applied, the true accuracy of the probe can be realized.

The FL7218 communicates through glass fiber optic cables, up to 100 meters long, to the FI7000 interface. X, Y, Z, and isotropic readings can be returned through an FI7000 in 20 msec.

FL7218 Typical Uncalibrated Frequency Response

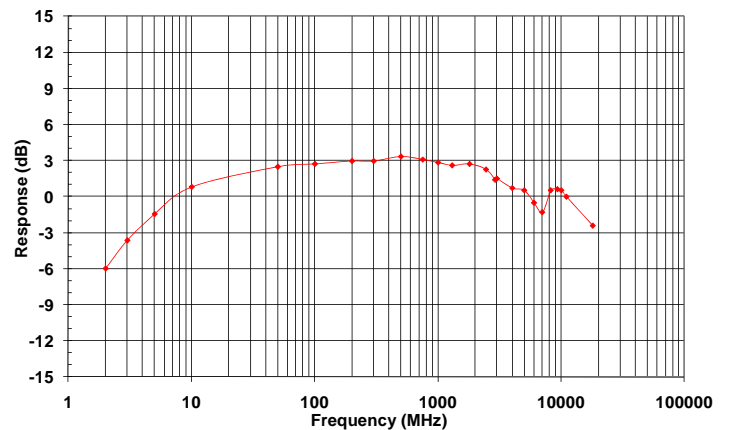

FL7218 Typical Calibrated Frequency Response
(with correction factors applied)

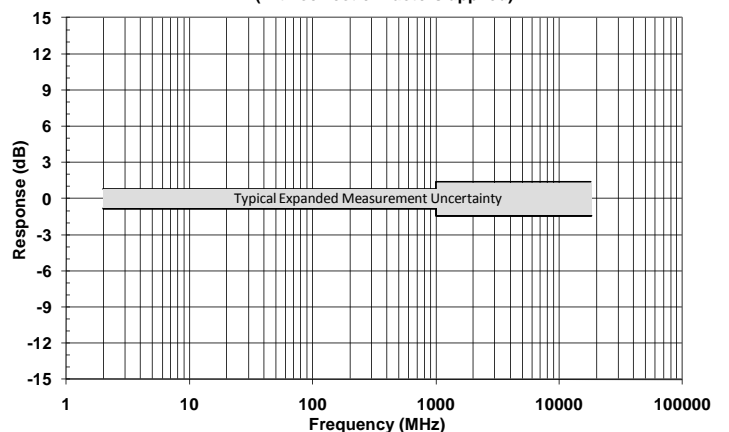

AR RF/Microwave
Instrumentation
160 School House Rd
Souderton, PA 18964
215-723-8181

For an applications engineer call: 800.933.8181

www.arworld.us

Specifications

FL7218

Electric Field Probe

- 2MHz–18GHz
- 2–1000 V/m
- User-selectable X, Y, Z Axes

Amplitude Accuracy (field aligned with sensor axes):

Without correction factors applied: ± 1.0 dB @ 10 MHz

With correction factors applied: Typical expanded measurement uncertainty (95% confidence interval), 0.8 dB, 2 MHz–1 GHz; 1.4 dB, 1GHz–18 GHz

Response Time/Sampling Rate (through FI7000):

20 msec/up to 50 samples per second at FI7000, USB and GPIB only

Isotropic Deviation (measured at the ortho angle): ± 0.5 dB @ 10 MHz; ± 1.5 dB, 2 MHz–18 GHz (typical)

Operating Range: 2–1000 V/m

Linearity, 2 to 1000 V/m: ± 0.5 dB

Temperature Stability: ± 0.5 dB over operating temperature range

Damage Level: 1200 V/m CW

Ranges: Single continuous range

Data returned from probe: X, Y, Z axes, and composite

Power Requirements: Laser powered from FI7000 interface

Dimensions: Approx. 278 x 65 x 65 mm (10.95 x 2.6 x 2.6 in)

Probe Head Diameter: 65 mm (2.6 in)

Weight: Approx. 150 g (5.3 oz)

Operating Temperature Range: 10°C to 40°C (50°F to 104°F) @ 5% to 95% RH non-condensing

Fiber Optic Connectors: Two E2000 compact duplex connectors at 1 meter, includes fiber optic verification loop.

Calibration Data: Accredited Calibration Report (A2LA) supplied with probe