

Tel: (818) 998-0223 Fax: (818) 998-6892

sales@AHSystems.com www.AHSystems.com

**SAS-542 Folding Biconical Antenna** 20 MHz – 330 MHz Biconical Antenna with folding elements for portable applications.



Frequency Range: 20 MHz - 330 MHz Antenna Factor: 8.5 to 21.5 dB Gain: -22 to 2.8 dBi Maximum Continuous Power: 1 Watt Max Radiated Field: 2 V/m Pattern Type: omni-directional Impedance: 50  $\Omega$ VSWR: 2.0:1 Connector: N-Type, female Mounting: ABC-B (included)


## Features

- Folding elements for easy storage •
- Frequency Range of 20 MHz to 330 MHz
- Omni-directional, Receive and Transmit
- Individually Calibrated (1, 3 and 10 Meter calibration included, horizontal polarization)
- Three Year Warranty

The SAS-542 Folding Biconical Antenna was the first EMC antenna designed for portable compliance testing applications. The Biconical Elements unscrew from the balun and fold neatly into a small size for transportation. For rapid deployment, along with the mobility of a small package, the Folding Biconical elements can be closed similar to an umbrella allowing the antenna to be contained in an optional transit storage case. This Biconical antenna is ideal solution for any traveling compliance consultant performing site attenuation measurements.

## **Recommended Accessories**

- ATU-510 (Antenna Tripod, Wooden)
- AEH-510 (Azimuth and Elevation Head)
- PAM-0202 (30 dB Preamplifier)




Tel: (818) 998-0223 Fax: (818) 998-6892

٠

sales@AHSystems.com www.AHSystems.com

Antenna Data

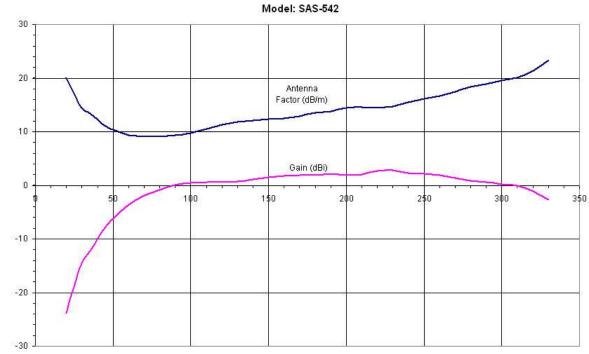

Frequency (MHz)

