



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223

Fax: (818) 998-6892



sales@AHSystems.com



www.AHSystems.com

SAS-564

Passive Loop Antenna

1 KHz – 30 MHz

Input handling capability up to 500 Watts CW,
and rugged design make this loop antenna
excellent for immunity and shielding
effectiveness testing.



Frequency Range: 1 kHz – 30 MHz

Max. Continuous Input: 500 Watts

Connector: N, Female

Mounting Base: 1/4 x 20 Thread, Female

Features

- Broad Frequency Range of 1 KHz to 30 MHz
- Individually Calibrated (Calibration included per ARP-958)
- Three Year Warranty

A.H. Systems' designs manufactures and delivers high performance Loop Antennas for a wide range of magnetic field testing. Whether used in a set to measure shielding effectiveness per IEEE 299, MIL-STD 285 and NSA 65-6, or individually to satisfy specific requirements, the Loop Antenna is an efficient, low cost solution.

Recommended Accessories

- SAS-563B (Active Shielded loop Antenna)
- ATU-510 (Antenna Tripod, wooden)



A.H. Systems, Inc.

9710 Cozycroft Ave.

Chatsworth, CA 91311



Tel: (818) 998-0223

Fax: (818) 998-6892



sales@AHSystems.com



www.AHSystems.com



A.H. Systems Inc.

9710 Cozycroft Ave. Chatsworth, CA 91311


Phone (818) 998-0223 Fax (818) 998-6892

E-mail: sales@AHSystems.com

Web site: <http://www.AHSystems.com>

Magnetic Correction Factor

Model: SAS-564

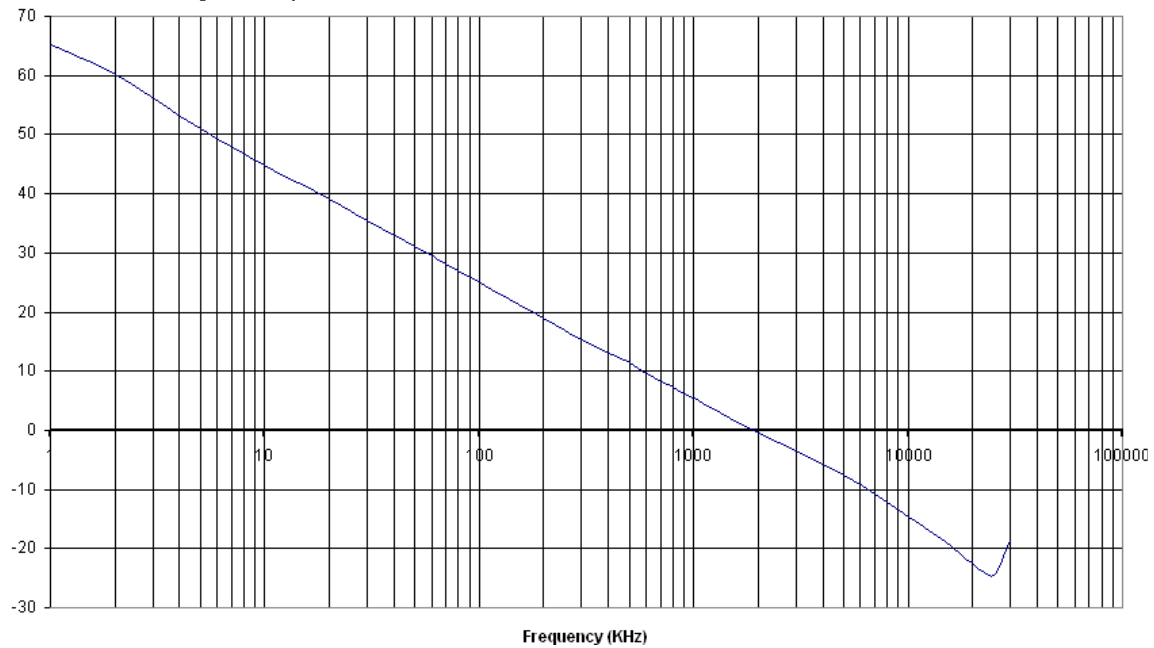

Physical Dimensions

Loop Diameter: 12 in. (30.5 cm)

Weight: 1.9 lb.'s (0.86 kg)