


Meets the requirements of ASTM D 6164, Type I, Grade G

Features and Components

PIM Shield™ Technology: Engineered to reduce passive intermodulation (PIM) interference on buildings supporting mobile communications infrastructure.

Ceramic-Coated Roofing Granules: Specifically engineered for optimal embedment in the SBS-blend sheet. The ceramic coating promotes excellent long-term adhesion. The granules, available in White or Black.

High-Quality SBS Rubber and Asphalt Blend: Lends elasticity and flexibility to the sheet. The elongation and recovery properties allow the product to easily accommodate the continual expansion and contraction experienced on all roofs. The FR blend contains additional fire-retardant additives.

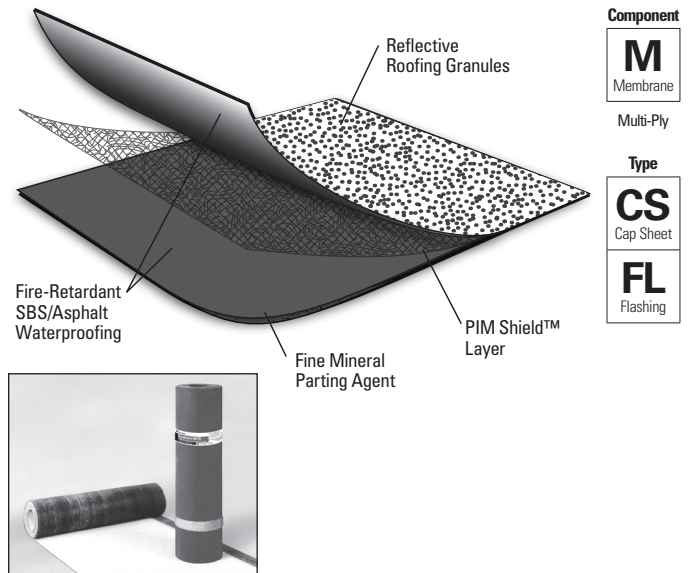

Colors: White or Black.

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
Compatible with the selected Multi-Ply systems above								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
Do not use with Single Ply systems							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

Test	Initial	3-Year Aged
Reflectivity* (ASTM C 1549)	0.26	0.27
Emissivity* (ASTM C 1371)	0.87	0.84
Solar Reflectance Index* (SRI) - E 1980	25	25
Pre-Consumer Recycled Content	0%	
Post-Consumer Recycled Content	0%	

*Standard White Granule only

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in most 2-5 ply JM SBS systems.*	Up to 30 years

*Contact JM Technical Services for specific system requirements for guarantee lengths.

Codes and Approvals



Product Application



- May be installed in Type IV asphalt or in an approved JM adhesive
- Laps may be installed using heat-welding techniques
- Refer to JM SBS modified bitumen specifications and detail drawings for application and slope information

Packaging and Dimensions

Roll Coverage*	95.8 ft ² (8.9 m ²)
Roll Length	32' 10" (10.01 m)
Roll Width	39 3/8" (1 m)
Roll Weight	101 lb (46 kg)
Rolls per Pallet	20
Pallet Weight	2,198 lb (997 kg)
Pallets per Truck**	22

*Assumes a 4" side lap **Assumes 48' flatbed truck.

Meets the requirements of ASTM D 6164, Type I, Grade G

Tested Physical Properties

Physical Properties		ASTM Test Method	Standard for ASTM D 6164, Type I, Grade G (Min.)	DynaLastic 180 FR	
				MD*	XMD**
Strength	Tensile Tear	D 5147	55 lbf (245 N)	125 lbf (556 N)	90 lbf (400 N)
	Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12 kN/m)	110 lbf/in (19.3 kN/m)	90 lbf/in (15.8 kN/m)
	Peak Load at 73.4°F (23°C)	D 5147	50 lbf/in (8.8 kN/m)	80 lbf/in (14.0 kN/m)	60 lbf/in (10.5 kN/m)
Longevity	Low Temp. Flexibility	Unconditioned	D 5147	0°F (-18°C)	-20°F (-29°C)
		90-Day Heat Conditioned	D 5147	0°F (-18°C)	-20°F (-29°C)
	Compound Stability	D 5147	215°F (102°C)	250°F (121°C)	
	Granule Loss	D 4977	2 g (0.07 oz)	0.7 g (0.02 oz)	
	Thickness	D 5147	130 mil (3.3 mm)	157 mil (4.0 mm)	
	Selvage Edge Thickness	D 5147	N/A	119 mil (3.0 mm)	
	Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	35%	40%
	Elongation at Peak Load at 73.4°F (23°C)	D 5147	35%	55%	60%
Ultimate Elongation at 73.4°F (23°C)	D 5147	38%	70%	80%	
Aged Performance	90-Day Heat-Conditioned Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12 kN/m)	110 lbf/in (19.3 kN/m)	90 lbf/in (15.8 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	25%	25%
	90-Day Heat-Conditioned Peak Load at 73.4°F (23°C)	D 5147	50 lbf/in (8.8 kN/m)	85 lbf/in (14.9 kN/m)	65 lbf/in (11.4 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 73.4°F (23°C)	D 5147	35%	35%	45%
	90-Day Heat-Conditioned Ultimate Elongation at 73.4°F (23°C)	D 5147	38%	45%	45%
Installation	Dimensional Stability	D 5147	1.0%	0.2%	0.1%
	Net Mass per Unit Area	D 146	75 lb/100 ft ² (34 kg/9.29 m ²)	93 lb/100 ft ² (42 kg/9.29 m ²)	
	Roll Weight	D 146	N/A	101 lb (46 kg)	

*MD = Machine Direction

**XMD = Cross-Machine Direction

Note: Material tested in accordance with ASTM D 5147 Standard Test Methods for Sampling and Testing Modified Bituminous Sheet Materials.

Tested Electrical Properties

Parameter	Specification	Test Conditions
Operating Frequency	300 MHz - 2700 MHz	Frequency range over which the 1-way attenuation of the membrane is >10 dB
Radiated Passive Intermodulation, IM3	<-100 dBm (<-143 dBc)	Source antenna: 8.5 dBi +/- 1.5 dB gain Test specimen separation: 5 FT (1.5m) Test power: 2x 20W (+43 dBm)