




## CBA 1G-600D 80 MHz TO 1 GHz 600 WATT BROADBAND POWER AMPLIFIER



- Compact Design
- Touch Screen Color Display
- Input Overdrive Protection
- USB, Ethernet, GPIB, RS232 Interface
- Built in Calibrated Directional Coupler

New, high power density, design has allowed us to produce a 600 watt 80MHz to 1GHz amplifier in a compact 6U package. With a minimum of 500 watts of linear power this amplifier is ideal for RF immunity testing to various industry standards such as IEC61000-4-3, MIL-STD 461, ISO11452 and RTCA DO160. Compatible with a wide range of available antenna such as the Teseq CBL range and test systems such as the Teseq NSG4070 and ITS 6006 these amplifiers can be easily built into integrated test systems. The touch screen colour display gives an immediate visual indication of forward and reverse power along with the current operating status of the amplifier and access to diagnostic information such as gate current and heatsink temperature.

Fan speed adjusts depending on the heatsink temperature thus ensuring the minimum audio noise level possible in the operating environment. The inbuilt calibrated directional coupler provides a quick and easy way to monitor forward and reflected power with any power meter. Input over-drive protection prevents damage to the input devices due to accidental high input power. Multiple remote interfaces are available as standard including USB, GPIB, RS232 and Ethernet. Amplifier gain can be controlled either remotely through one of the available interfaces or via the front panel touch screen.

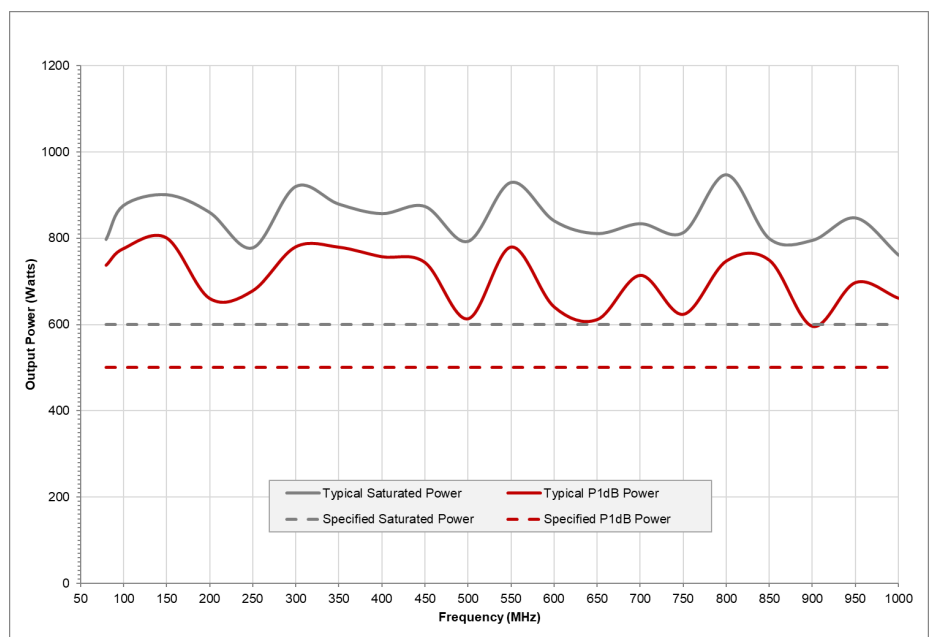



## **CBA 1G-600D** **80 MHZ TO 1 GHZ 600 WATT** **BROADBAND POWER AMPLIFIER**

### **Key Parameters**

Frequency	80 MHz to 1 GHz
Saturated Power	600 Watts (minimum)
Power at P1 dB	500 Watts (minimum)
Gain	58 dB
Gain Flatness	+/-3 dB (maximum)

### **Additional RF Data**

Harmonics at 500 W	-18 dBc (minimum)
Maximum Input without Damage	+10 dBm
Spurious	-50 dBc
Stability	Unconditionally stable
Load VSWR without damage (All Phase Angles)	Infinite
Load VSWR without foldback (All Phase Angles)	4:1
RF Input	Type N (socket)
RF Output	Type N (socket)
Gain Control	0–30 dB in 255 steps

### **Impedance/VSWR**

Output Impedance	50 $\Omega$
Input VSWR	2:1
Output VSWR	2:1

### **Interfaces and Electrical**

Interface	Touch screen, GPIB, RS232, Ethernet & USB
Safety Interlock	BNC Connector, Open for Standby
Supply Voltage	3 Phase 200-240 VAC Line to Line (Delta) 3 Phase 380-415 VAC Line to Line +N (Star) Specified when ordered
Supply Frequency	47–63 Hz
Supply Power Requirement	<3 kVA

### **Physical and Environmental**

Dimensions	6U, 19 Inch Rack width, 686 mm deep
Weight	58 kg
Temperature Operational	0°C–40°C
Temperature Non Operating	-40°C–85°C
Humidity (Non Condensing)	95%

### **Options: To be specified at time of ordering**

Rear Panel RF Connectors	CBA 1G-600D-10
Front Panel RF Connectors	CBA 1G-600D

## **CONTACT US!**

We're there where you need us.  
See details on the last page.



Advanced Test Solutions for EMC

## OUR SALES & SERVICE CENTERS

### China

#### **AMETEK Commercial Enterprise (Shanghai) Co. Ltd.**

Beijing Branch  
Western Section, 2nd Floor  
Jing Dong Fang Building (B10)  
Chaoyang District  
Beijing, China, 100015  
T +86 10 8526 2111  
[chinasales@ametek.com](mailto:chinasales@ametek.com)

#### **Shanghai Office:**

Part A1, A4, 2nd floor, Building No. 1  
No. 526 Fute 3rd Road East  
Pilot Free Trade Zone, Shanghai 200131,  
China  
T +86 21 5868 5111

#### **Guangzhou Office:**

Room 1410-12, Yian Plaza  
33 Jian She Liu Ma Road  
Guangzhou, China  
T +86 20 8363 4768

### Germany

#### **AMETEK CTS Europe GmbH**

Lünener Straße 211  
59174 Kamen, Deutschland  
T +49 2307 26070-0  
[sales.cts.de@ametek.com](mailto:sales.cts.de@ametek.com)

### Great Britain

#### **AMETEK CTS UK**

Park Road  
Ryde  
Isle of Wight PO33 2BE  
Great Britain  
T +44 1983 618 000  
[milmega.service@ametek.com](mailto:milmega.service@ametek.com)

### Japan

#### **AMETEK Co. Ltd.**

##### **Tokyo office**

3rd floor, Shiba NBF Tower,  
1-1-30 Shiba-Daimon, Minato-ku  
Tokyo, 105-0012, Japan  
T +81 3 6809 2401  
[cts-japan.sales@ametek.com](mailto:cts-japan.sales@ametek.com)

##### **Nagoya Office**

1-329 Kifune Meito-ku Nagoya-shi  
Aichi-ken, 465-0058, Japan  
T +81 52 709 5501

### Singapore

#### **AMETEK Singapore Pte. Ltd.**

No. 43 Changi South Avenue 2  
#04-01 Singapore 486164  
T +65 6484 2388  
[singaporesales.cts@ametek.com](mailto:singaporesales.cts@ametek.com)

### Taiwan

#### **AMETEK Taiwan Corp. Ltd.**

10F-5, No. 120, Sec 2,  
GongDaoWu Rd.,  
Hsinchu City 30072, Taiwan  
T +886 3 57 5099  
[taiwan.sales.cts@ametek.com](mailto:taiwan.sales.cts@ametek.com)

### USA

#### **AMETEK CTS US**

52 Mayfield Avenue  
Edison, New Jersey 08837, USA  
T +1 732 417 0501  
Toll free: +1 888 417 0501  
[usasales.cts@ametek.com](mailto:usasales.cts@ametek.com)

## CARE TO LEARN MORE ABOUT AMETEK CTS.

With service and sales centers  
in Germany, Switzerland,  
China, Japan, Singapore, the  
USA and Great Britain, and  
accredited labs across the globe,  
we're where you need us.



**GET MORE INFO ABOUT US AT:**  
[www.ametek-cts.com](http://www.ametek-cts.com)

The contacts of our global  
distribution partners could be  
found at [www.teseq.com](http://www.teseq.com)